



Sonoff RF Bridge R2 433MHz RF-WiFi

Ref. SONOFFBRIDGER2


Sonoff RF Bridge R2 433MHz RF-WiFi Sonoff Bridge creates the connection between RF smart controls operating at 433.92 MHz and WiFi-enabled smart devices managed remotely via the Internet, and connects wireless RF sensors to the eWeLink platform to manage the relays, switches, and smart plugs of Sonoff. ✓ New R2 version released in the third quarter of 2021 with improved RF receiver and transmitter.




Product data

Certs	CE, ROHS
Dimensions (mm) LxWxH	61x61x20mm
Material	PC
Temperature range	-10°F to +40°F
Control system	Android & IOS
Nominal Voltage (V)	5V 1A

WiFi: Si

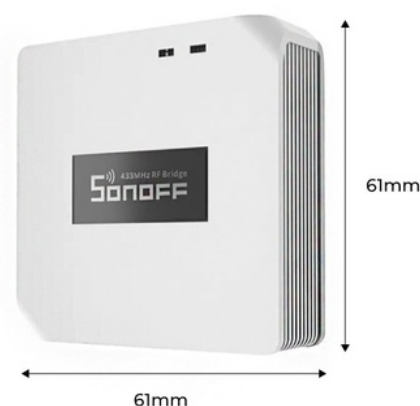

Product variants

Reference	Attributes
SONOFFBRIDGER2	 <div><div>Sonoff</div><div><div><div></div></div><div><div></div></div><div><div></div></div></div></div>