



DALI + Push AC Phase Cut Dimmer
2303SAC-HP

Important: Read All Instructions Prior to Installation

Function Introduction

DALI signal input: 0-230V~ switch input


Min. Set: To set the minimum brightness

LED indicator flashes when receives DALI signal

1 CH 100-240V AC output

Product Data				
Input Voltage	Output Voltage	Output Current	DALI Consumption	Standby Power
100-240V AC	100-240V AC	1.5A max	20W max	45.5mW@230V


Compatible Load Types			
Load Symbol	Load Type	Maximum Load	Remarks
	Dimmable LED lamps	200W @ 220V 100W @ 110V	Due to variety of LED lamp design, maximum number of LED lamps to be used must be checked by user before installation.
	Dimmable LED drivers	200W @ 220V 100W @ 110V	Maximum permitted number of drivers is 200W in case of driver compatible power range.
	Incandescent lighting (W/transformer)	600W @ 220V 300W @ 110V	
	Low voltage halogen lighting with electronic transformers	200W @ 220V 100W @ 110V	

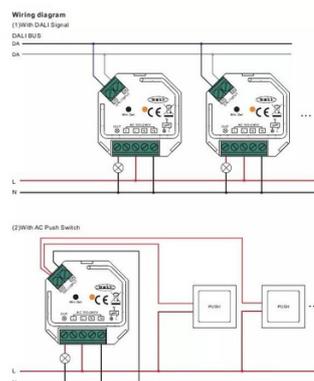

Controlador monocolor DALI y PUSH Dimmer - 400W - 1 canal - 100-240V AC - Sunricher


Ref. SR-2303SAC-HP

El controlador SR-2303SAC-HP es un regulador por corte de final de fase (trailing edge) con un canal controlable por DALI y PUSH (pulsador). Cuenta con entrada y salida a 100-240V/AC y 1 canal con una salida máxima de 400W. Es adecuado para lámparas LED regulables, halógenas o fuentes de alimentación regulables por corte en fin de fase. Cuenta con una innovadora función de brillo mínimo ajustable por el usuario y el mismo se puede regular hasta el 100%. Tamaño mini, fácil de instalar en una caja de pared estándar de 86x86mm. **Compatible con DALI-2**



Datos del producto

Certificados	CE, ROHS
Dimensiones (mm) LxIxh	45.5x45x20.3
Garantía	5 años
Intensidad máxima (A)	1.5
Sistema de control	DALI
Tensión Nominal (V)	100 - 240V AC

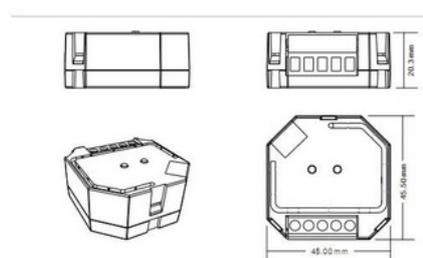

Variantes de producto

Referencia

Atributos

SR-2303SAC-HP

