


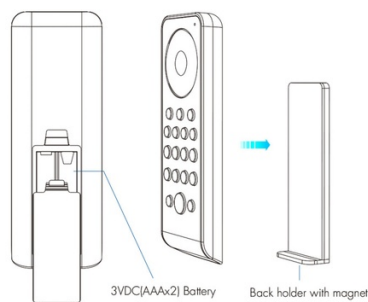

Each zone can match single color: dual color(WW/CW), RGB, RGBW, or RGB+CCT(WW/CW) RF LED controller.

- Single color
- Dual color(WW/CW)
- RGB
- RGBW
- RGB+CCT


For example, long press **1** key for 2s will set zone 1 to RGB light type.  
When remote type change, CH-LED green indicator goes on a long time.  
Long press **2** key + any of the five key for 2s will set all 8 zones to the same light type correspondingly.

Touch to change current zone brightness, color temperature or RGB color.  
Press BFT, CCT or RGB key to switch between brightness wheel, color temp wheel or RGB color wheel.

## Telecomando LED monocolore/CCT/RGB/RGBW/RGB+CCT - 8 zone / 8 scene - SK-RS10 - Skydance


### Ref. SK-RS10-N

Il telecomando wireless Skydance, monocromatico, CCT, RGB, RGBW, RGB + CCT con 8 zone consente di regolare il colore e l'intensità della luce con una ruota tattile e pulsanti indipendenti. Trasmissione RF veloce e affidabile fino a 30 metri. Include supporto da parete.

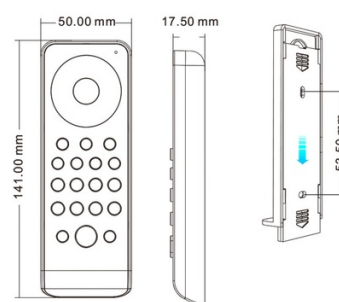

### Dati del prodotto

|                           |                    |
|---------------------------|--------------------|
| Alto                      | 17,5 mm            |
| Larghezza                 | 50mm               |
| Certificati               | CE, ROHS           |
| Connettività              | RF                 |
| Controllo del colore      | RGB, RGBW, RGB+CCT |
| Distanza di controllo     | 30m                |
| Garanzia                  | 5 anni             |
| Lungo                     | 141mm              |
| Materiale                 | Polycarbonato      |
| Intervallo di temperatura | -30°C ~ +55°C      |
| Tipo di batteria          | 3V (AAA * 2PEZZI)  |

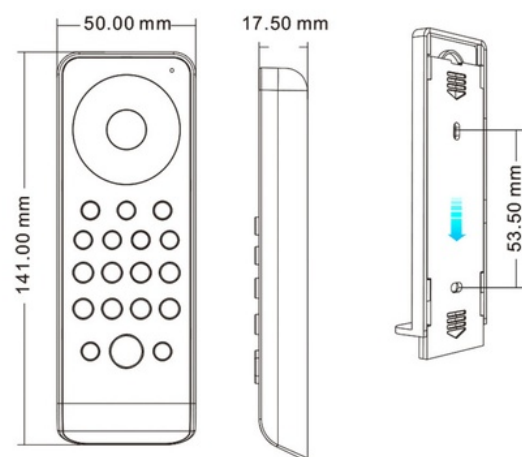

## Varianti di prodotto

Riferimento

Attributi

SK-RS10-N

