




FUMAGALLI ESTER Road Bollard with GX53 Base 10W 1200lm CCT

LED Bollard for Pathway Lighting, constructed from high-quality resin, weather-resistant, rain, dirt, and impact proof. Specifically designed for outdoor use thanks to its IP55 protection rating. Includes a replaceable 10W GX53 LED bulb with 1200 lumens, which features a temperature selector allowing you to choose between 4000K, 3000K, and 6500K. This model is the older brother of the ESTER 500 bollard [1]. * LED bulb included * ✓ GX53 CCT ✓ 10W 1200lm ✓ IP55 [1] <https://www.barcelonaed.com/iluminacion-exterior-jardin/bolardo-caminos-mini-fumagalli-ester-500.html>



Product data

| | |
|-------------------------|---|
| Case color (use) | White (use), Black (use), Gray (to use) |
| Light temperature (use) | CCT (to use) |
| Cap | GX53 |
| Certs | CE, ROHS |
| Energy efficiency class | A+ (2021) |
| Dimensions (mm) LxWxH | 175x175x800 |
| Dimmable | No |
| Frequency (Hz) | 50 - 60 |
| Frequency of Use | Intensive |
| Guarantee | According to legal warranty: 3 years |
| IP | IP55 |
| Kelvin (K) | 4000 |
| Material | Resin |
| Assembly | Surface |
| Temperature range | -20°F ~ +40°F |
| Nominal Voltage (V) | 100-240 |
| Key | Neutral white |
| Outdoor Use | If |
| Recommended Use | Garden |
| Service life (h) | 25,000 |

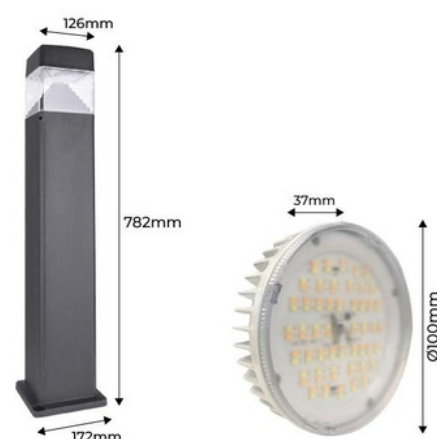

Product variants

| Reference | Attributes | |
|-------------------|--|---|
| DS1.564.000.AXD1K | Case color (use): Black (use), Light temperature (use): CCT (to use) |  |
| DS1.564.000.LXD1K | Case color (use): Gray (to use), Light temperature (use): CCT (to use) |  |
| DS1.564.000.WXD1K | Case color (use): White (use), Light temperature (use): CCT (to use) |  |