






LED downlight plate 12W circular recessed Cut Ø155mm

Downlight LED extraplano empotrable circular 12W SMDs 2835 230V-AC Ø170mm Color Blanco α 160° Incluye driver externo Equivale a dos bombillas de bajo consumo de 18w. 12W 230V Driver externo incluido Marco blanco Diámetro 170mm Ángulo 160° Chip SMD2835

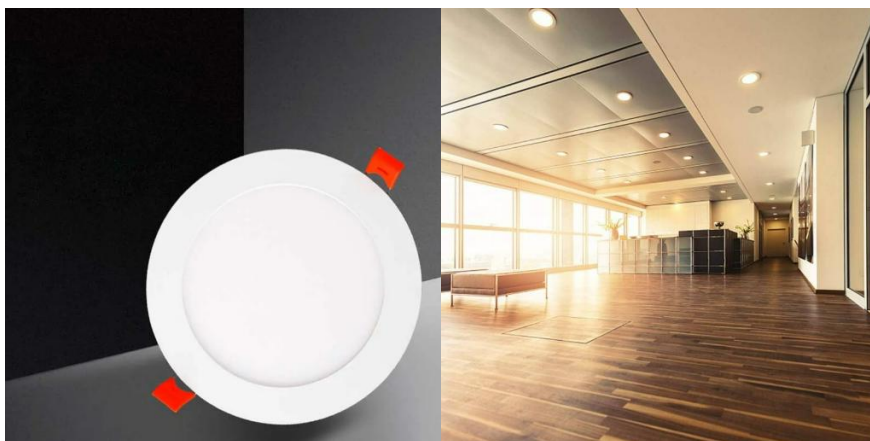

Caractéristiques du produit

T° de lumière	3000°K, 4000°K, 6000K
Angle d'ouverture (°)	160
Certificats	CE, ROHS
Classe d'efficacité énergétique	F
Forme	Circulaire, Ultrafine
IP	IP20
Kelvin (K)	3000, 4000, 6000
Puissance (W)	12
Tension Nominale (V)	220 - 240 V CA
Type de LED	SMD 2835
Tonalité	Blanc chaud, Blanc froid, Blanc neutre
Durée de vie (h)	25000



Variantes du produit

Référence

Attributs

B1271-5-BC

T° de lumière : 3000°K



B1271-5-BF

T° de lumière : 6000K



B1271-5-BN

T° de lumière : 4000°K

