





## Three-phase recessed track for LED spotlights - 2 meter bar

2-meter profile of three-phase rail for embedding. Supplied with the necessary accessories for installation and fixation, the rail can be cut to the desired length. The design of the rail incorporates 2 cover wings that conceal any imperfections that may be present in the cut and flush completely against the ceiling. \*\* Includes starter feeder and end cap \*\* 230V Max. 250W per meter Dimensions: 2000x55x35mm. IP20

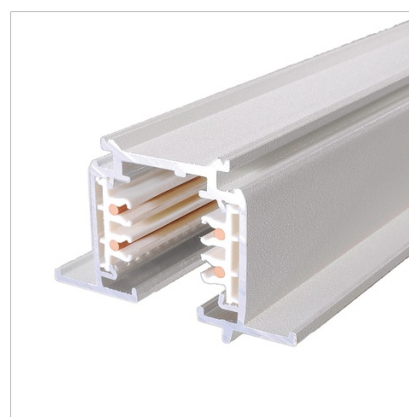

### Product data

Housing color	White (use), Black (use)
Certs	CE, ROHS
Dimensions (mm) LxWxH	2000x55x35
Guarantee	According to legal warranty: 3 years
Maximum intensity (A)	15
IP	IP20
Assembly	Recessed
Maximum power (W)	3900
Nominal Voltage (V)	220 - 250 V AC
Track Type	Three-phase
Outdoor Use	No

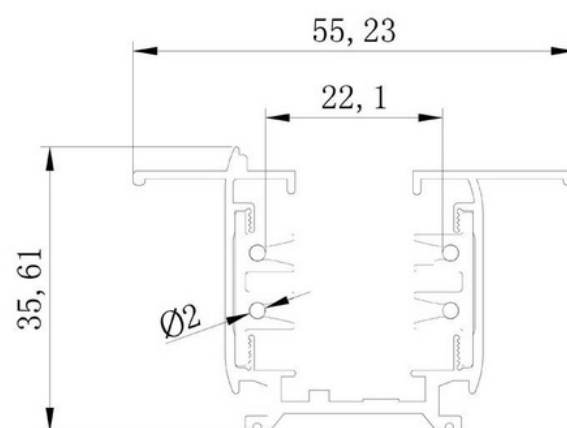

## Product variants

Reference

Attributes

BTTE-200-B

Housing color: White (use)



BTTE-200-N

Housing color: Black (use)

