




## Linkable LED tri-proof light - 40W - 47.2in - IP65

### Ref. B8400-120BN

Waterproof LED panel integrated with a length of 120cm and a power of 40W, featuring a luminous efficiency of 130 LM/W, perfect for replacing conventional fluorescent tube panels, with a 50% energy saving. It incorporates a Sanan SMD2835 professional-use LED chip with high brightness. Made from water-resistant polycarbonate (IP65 protection and IK08 rating against impacts and falls). 1180x72x61mm 40W 230V 5200LM IP65 130 LM/W

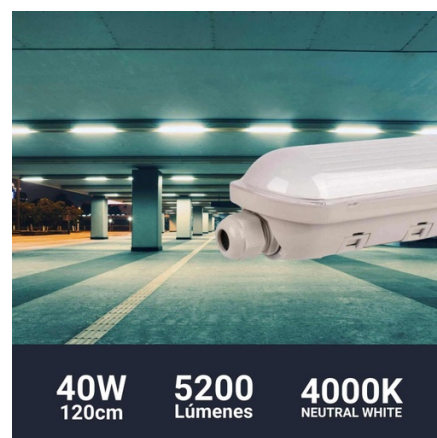

### Product data

Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	D
CRI	80-85
Dimensions (mm) LxWxH	1180x72x61
Dimmable	No
Efficiency (Lm/w)	130
Power factor (cosφ)	0.9
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	5 years
IK	08
IP	IP65
Kelvin (K)	4000
Lumens (Lm)	5200
Material	Polycarbonate
Material diffuser	Polycarbonate
Temperature range	-20°F ~ +40°F
Sensor	No
Nominal Voltage (V)	230V AC
Type of LED	SMD 2835
Key	Neutral white



UGR	No
Outdoor Use	If
Recommended Use	Commerce, Parking
Service life (h)	25,000

Product variants

Reference	Attributes
B8400-120BN	
	