

Downlight LED CCT high efficiency - 40W - Driver Lifud - Cut Ø 200-220mm IP54


Ref. B1265-CCT

High-efficiency LED downlight, ideal for commercial spaces. It has a power of 40W and incorporates a CCT system, allowing the selection of the light color temperature between warm white (3000K), neutral white (4000K), and cool white (5400K), according to the needs of each space. It incorporates a high-quality LIFUD driver that enables powerful, stable, and flicker-free lighting. Thanks to its IP54 protection rating, it is suitable for outdoor use.



Product data

Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	Ø230x50
Cutting dimensions (mm)	Ø200-220
Driver	Lifud
Power factor (cosφ)	0.9
Form	Circular
Warranty	According to legal warranty: 3 years
IP	IP54
Kelvin (K)	3000, 4000, 5400
Material	Polycarbonate
Material diffuser	Polycarbonate
Assembly	Recessed
Power (W)	40
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	CCT
Outdoor Use	Yes
Recommended Use	Offices

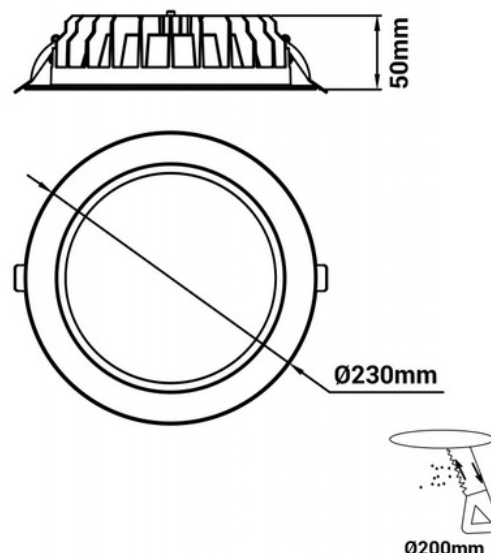

Product variants

Reference

Attributes

B1265-CCT

