



## Outdoor LED floodlight 50W - 12-24V DC - 120° - IP66


### Ref. B1886-50-BF

Low voltage waterproof LED projector, with a compact and sturdy design, meeting high quality standards. It emits light in cool white tone (5000K) with a power of 50W and a luminous output of 7900lm. Thanks to its protection rating IP66, it is suitable for outdoor use, even in unfavorable environmental conditions. By operating at low voltage, it is ideal for use in boats, gardens, caravans, areas near swimming pools, among many other possible applications.




### Product data

|                       |                                      |
|-----------------------|--------------------------------------|
| Beam angle (°)        | 120                                  |
| Certs                 | CE, ROHS                             |
| CRI                   | 80-85                                |
| Dimensions (mm) LxWxH | 275x200x45                           |
| Dimmable              | No                                   |
| Projector Range       | 12-24V                               |
| Warranty              | According to legal warranty: 3 years |
| IP                    | IP66                                 |
| Kelvin (K)            | 5000                                 |
| Lumens (Lm)           | 7000                                 |
| Material              | Metal                                |
| Material diffuser     | Crystal                              |
| Assembly              | Surface                              |
| Orientable            | Yes                                  |
| Power (W)             | 50                                   |
| Nominal Voltage (V)   | 10-30V DC                            |
| Type of LED           | Chip EPISTAR                         |
| Key                   | Cold white                           |
| Outdoor Use           | Yes                                  |
| Recommended Use       | Garden, Commerce, Facades, Vessels   |
| Service life (h)      | 25,000                               |

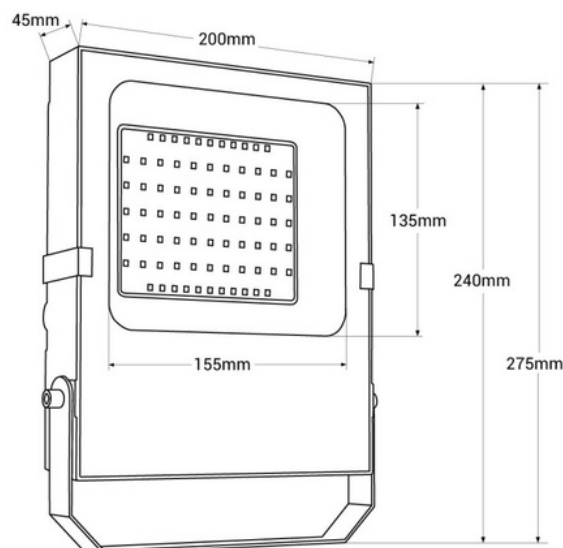

Product variants

| Reference   | Attributes  |
|-------------|---|
| B1886-50-BF |  |