


## Rectangular adjustable CCT LED Downlight - 38W - White - 120° LIFUD Driver

Recessed rectangular LED downlight, adjustable, made of high-quality aluminum, with a white finish. Especially recommended for commercial use, with 38W of power and CCT system, which allows selecting color temperature among warm white (3000K), neutral white (4000K), and cool white (5700K). Wide 120° opening angle and orientation of up to 60°. Efficient and durable.



### Product data

Case color	White (use), Black (use)
Opening angle (°)	120, 100
Certs	CE, ROHS
Cutting dimensions (mm)	≈225x125, 227 mm x 130 mm
Dimmable	No
Driver	External, Internal, Lifud
Form	Cuadrado
Frequency of Use	Intensive
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 5700
Material	Aluminum
Orientable	Yes, 60 degrees
Temperature range	-20°F ~ +40°F
Sensor	No
Key	Cold white, Neutral white, CCT
Outdoor Use	No
High	96mm
Width	145mm
Energy efficiency class	F
CRI	80-85
Long	240mm
Material diffuser	Crystal
Assembly	Recessed
Power (W)	38

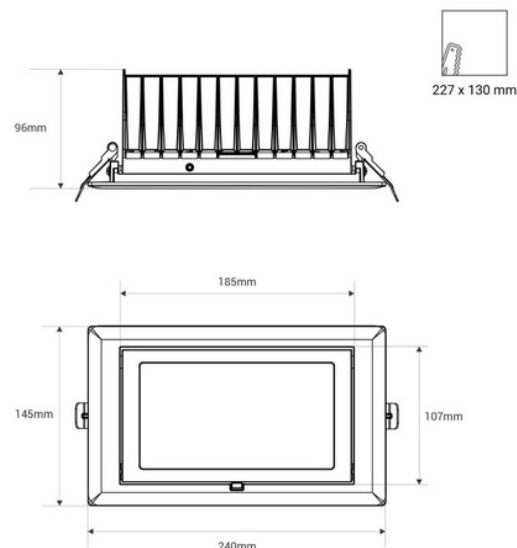

Nominal Voltage (V)	220 - 240 V AC
Type of LED	Chip EPISTAR
Recommended UseHotels, Commerce, Restaurants, Museums - Galleries, Fashion and retail	

Product variants

Reference	Attributes	
B1263-CCT	Case color : White (use)	
B1263-CCT-N	Case color : Black (use)	