

Recessed LED downlight - 15W - Adjustable cutout diameter: Ø 50-140mm

Adjustable diameter LED downlight with a modern and innovative design. It features 15W of power and an opal diffuser that ensures even lighting without glare. This downlight stands out for its sliding mounting springs, which allow it to adapt to holes with a variable diameter between 50 and 140mm. It is available in warm white (3000K), neutral white (4000K), and cool white (6000K). Its installation is very simple and it is suitable for both household and commercial use. **Mounting and connection accessories included**




Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Certs	CE, ROHS
Dimensions (mm) LxWxH	Ø 175 x 20
Cutting dimensions (mm)	Ø 50 to 140
Dimmable	No
Form	Circular, Ultrafine
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Material	Metal, Polycarbonate
Power (W)	15
Nominal Voltage (V)	220 - 240 V AC
Key	Warm white, Cold white, Neutral white
Outdoor Use	No



Ø50mm-140mm

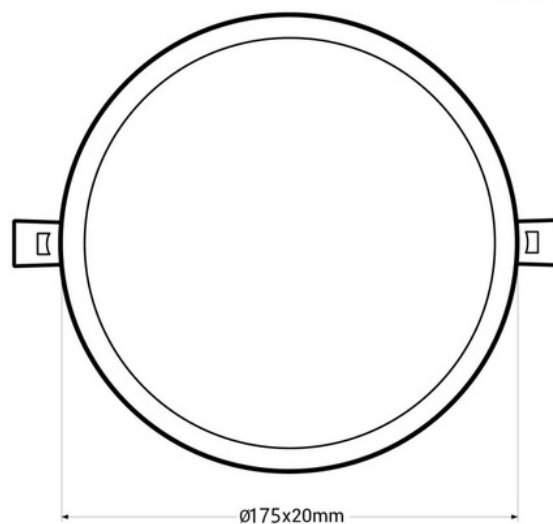

Product variants

Reference	Attributes	
B1277-BC	Light temperature : 3000°K (use)	
B1277-BF	Light temperature : 6000K (use)	
B1277-BN	Light temperature : 4000°K (use)	