




LED downlight 6W 24° Inclined "KOPPA".

6W LED Downlight recessed into the ceiling. Wall wash with a luminous angle of 24° and high-quality, efficient CREE COB chip. The LIFUD driver is included. With the wall wash, we achieve an attractive luminous effect with indirect light in any room, avoiding any glare. Multiple uses in homes and businesses to highlight objects, signs, pictures, etc. The LED downlight has a diameter of 85. The cut-out diameter for the ceiling is 75mm. 6W 230V ≈75mm Ø85mm COB CREE 24° IP20



Product data

Housing color	White (use), Black (use)
Light temperature	2700°K (use), 4000°K (use)
Opening angle (°)	24
Certs	CE, ROHS
CRI	80-85
Driver	Lifud
Form	Circular
IP	IP20
Kelvin (K)	4000, 2700
Material	Aluminum, Plastic
Power (W)	6
Nominal Voltage (V)	220 - 240 V AC
Type of LED	COB
Key	Warm white, Neutral white
Outdoor Use	No

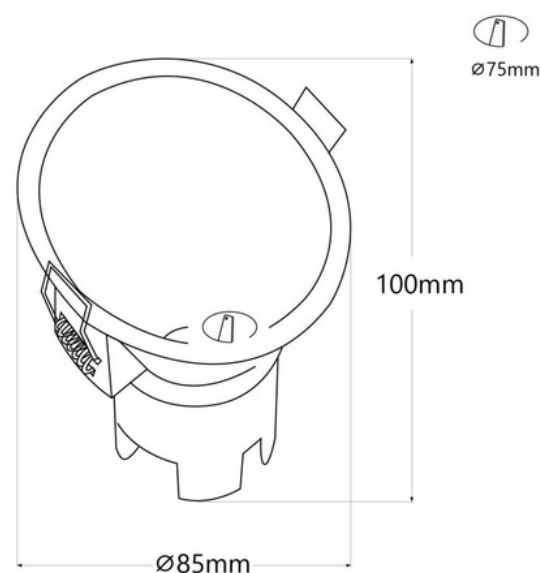

Product variants

Reference	Attributes	
MODI6-24-B-2700	Housing color: White (use), Light temperature : 2700°K (use)	
MODI6-24-B-4000	Housing color: White (use), Light temperature : 4000°K (use)	
MODI6-24-N-2700	Housing color: Black (use), Light temperature : 2700°K (use)	
MODI6-24-N-4000	Housing color: Black (use), Light temperature : 4000°K (use)	