



Downlight LED circular slim 20W - Corte Ø 225mm - 5 años de garantía

LED circular downlight with an ultra-thin, modern design and premium quality. It has 20W of power and an opal diffuser that allows for uniform lighting with a brightness of 1490 lumens. Includes a high-quality external driver "NO FLICKER" and with an EMC filter to avoid electromagnetic interference. Available in 3 shades: warm white, neutral white, and cool white. **Mounting and connection accessories included**

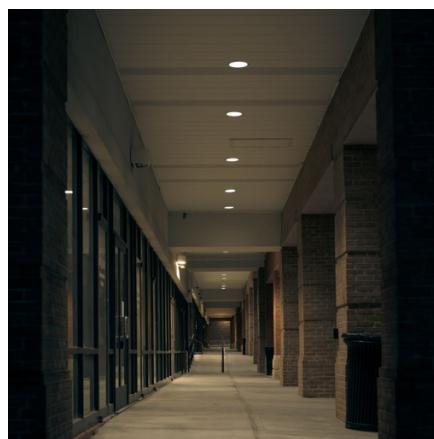

Product data

Light temperature	3000°K (use), 4000°K (use), 6500K (use)
Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	F
CRI	80-85
Dimensions (mm) LxWxH	Ø240x11
Cutting dimensions (mm)	Ø225
Dimmable	No
Power factor (cosφ)	0.5
Frequency (Hz)	50 - 60
Frequency of Use	normal
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	1490
Material	Aluminum
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Power (W)	20
Temperature range	-20°F ~ +40°F
Sensor	No
Nominal Voltage (V)	220 - 240 V AC

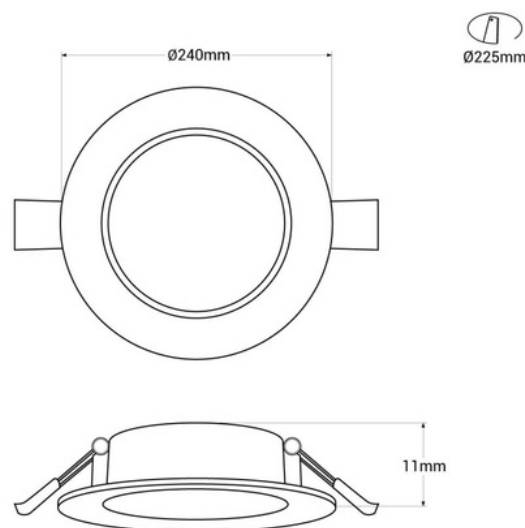

Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

Product variants

Reference	Attributes	
B1073-BC	Light temperature : 3000°K (use)	
B1073-BF	Light temperature : 6500K (use)	
B1073-BN	Light temperature : 4000°K (use)	