




72W


UGR<19

95 lm/W

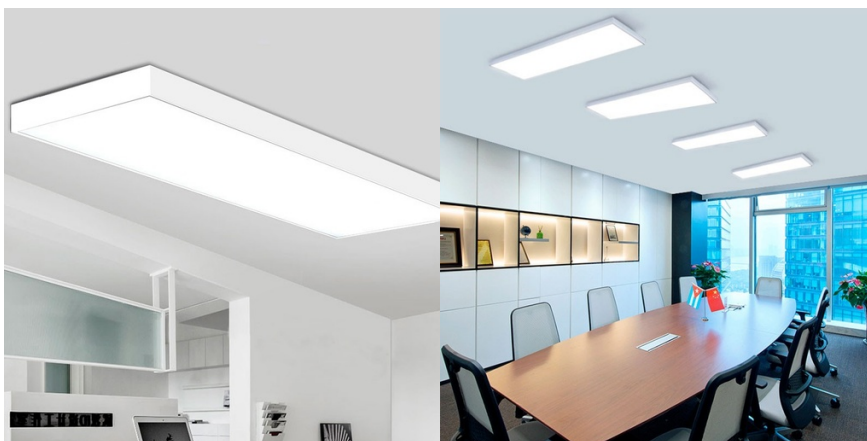

Slim surface LED panel 120X60cm - PHILIPS Driver - 72W - UGR19 - With mounting KIT

The surface-mounted LED panel with PHILIPS driver features a sleek, ultra-thin design and cutting-edge technology that allows it to provide powerful, uniform lighting in 3 color temperatures: warm white (2800K), neutral white (4000K), and cool white (6000K). It is a high-efficiency fixture with a power of 72W and a luminous flux of 5900 lumens. It incorporates a micro-prismatic diffuser that ensures glare-free illumination (UGR≤19), ideal for offices, conference rooms, schools, or hospitals. Thanks to its high color rendering index (CRI>80), it reproduces colors very similar to natural light. Includes surface mount kit with all the accessories for an easy and quick installation.

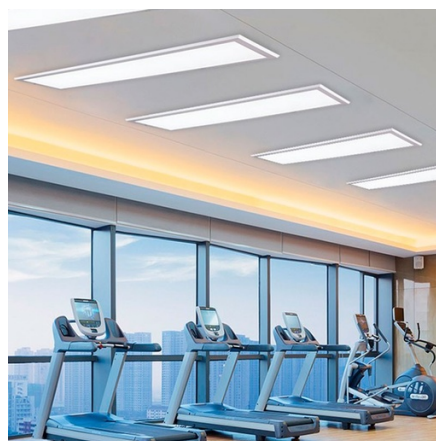

Product data

Light temperature	3000°K, 4000°K, 6000K
Beam angle (°)	160
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
LED Panel Dimensions	120x60
Driver	Philips
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Warranty	According to legal warranty: 3 years
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	5900
Material diffuser	Polycarbonate
Assembly	Surface
Orientable	No
Power (W)	72
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 4014
Key	Warm white, Cold white, Neutral white
UGR	UGR19
Outdoor Use	No



Recommended Use	Offices, Commerce
Service life (h)	25,000

Product variants

Reference

Attributes

B4291-BC

Light temperature : 3000°K



B4291-BF

Light temperature : 6000K



B4291-BN

Light temperature : 4000°K

