


60X60 cm slim surface LED panel - PHILIPS Driver - 44W - UGR19 - with mounting KIT

The PHILIPS surface-mounted LED panel features a sleek, ultra-thin design and cutting-edge technology that provides powerful, uniform lighting in 3 shades: warm white (2800K), neutral white (4000K), and cool white (6000K). It is a high-efficiency luminaire with a power of 44W and a luminous flux of 3800 lumens. It incorporates a micro-prismatic diffuser that ensures glare-free lighting (UGR<19), ideal for offices, conference rooms, schools, or hospitals. Thanks to its high color rendering index (CRI>80), it reproduces colors very similarly to natural light. Includes surface mount kit with all the accessories for a quick and easy installation.

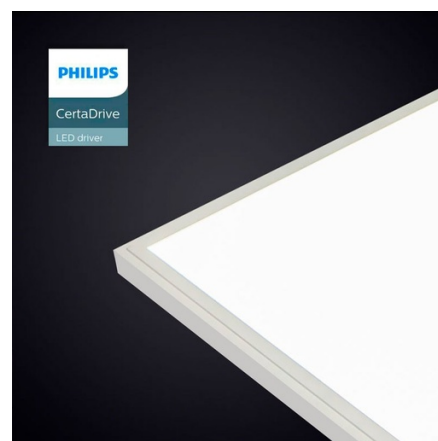

Product data

Light temperature (use)	3000°K (use), 4000°K (use), 6500K (use)
Certs	CE, ROHS
Energy efficiency class	F
CRI	80-85
LED Panel Dimensions	60x60
Dimmable	Optional, replacing the driver
Driver	External
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	According to legal warranty: 3 years
Kelvin (K)	4000, 6000, 2800
Lumens (Lm)	3800
Assembly	Surface
Orientable	No
Power (W)	44
Temperature range	-0°F ~ +30°F
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Recommended Use	Hotels, Offices, Commerce, Parking



Service life (h)

25,000

Product variants

Reference	Attributes	
B4292-UGR19-BC	Light temperature (use): 3000°K (use)	
B4292-UGR19-BF	Light temperature (use): 6500K (use)	
B4292-UGR19-BN	Light temperature (use): 4000°K (use)	