

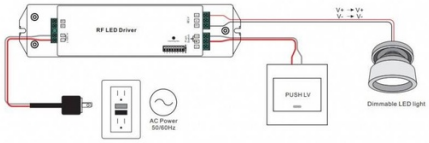

Driver regulable RF PUSH 8-48V 50W multicorriente (250-1500mA) - Perfect RF

Ref. SRP-1009-50CC

El SRP-1009-50CC es un controlador LED regulable de 50W con salida de corriente constante de 1 canal y corriente ajustable de 250ma a 1500ma por medio de interruptores DIP para las diferentes corrientes a corriente constante. Está diseñado con una entrada de 200 - 240V. El factor de potencia del controlador puede ser superior a 0,9 y la eficiencia es superior a 87%. Permite una atenuación suave y profunda de 0.1% sin parpadeos ni zumbidos. El controlador LED está diseñado con interfaz de control RF y puede ser compatible con una variedad de mandos a distancia RF. Este controlador es de la marca Sunricher de la categoría Perfect RF.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-46V	8-41V	8-38V	8-35V	8-33V
	Rated Power	50W							
Input	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
Protection	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
	Over Temperature	Yes, auto recovery after fault removed							
Environment	Working Temp.	-20℃ ~ +45℃							
	Max. Case Temp.	85℃							
	Working Humidity	10% ~ 95% RH non-condensing							
	Storage Temp. & Humidity	-40℃ ~ +80℃, 10% ~ 95% RH							

Datos del producto

Certificados	CE, ROHS
Garantía	5 años

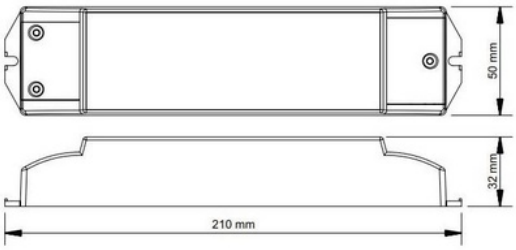

Variantes de producto

Referencia	*Atributos*	
SRP-1009-50CC		