

Sterownik ściemniający RF PUSH 8-48V 50W wieloprądowy (250-1500mA) - Perfect RF


Ref. SRP-1009-50CC

Sterownik SRP-1009-50CC to 50W ściemniający sterownik LED z stałym prądem wyjściowym 1 kanału oraz regulowanym prądem od 250mA do 1500mA za pomocą przełączników DIP dla różnych stałych prądów. Został zaprojektowany z wejściem 200 - 240V. Współczynnik mocy sterownika może być większy niż 0,9, a wydajność przekracza 87%. Umożliwia płynne i głębokie ściemnianie do 0,1% bez migotania czy brzęczenia. Sterownik LED został zaprojektowany z interfejsem sterowania RF i może być kompatybilny z różnymi zdalnymi kontrolerami RF. Ten sterownik pochodzi z marki Sunricher w kategorii Perfect RF.

Output	Selectable Current	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V	8-48V
Input	Selectable Current	800mA	900mA	1000mA	1100mA	1200mA	1300mA	1400mA	1500mA
	DC Voltage Range	8-48V	8-48V	8-48V	8-48V	8-41V	8-38V	8-35V	8-33V
Protection	Rated Power	50W							
	Voltage Range	200-240V AC							
	Frequency	50/60Hz							
	Power Factor (Typ.)	>0.9							
	Efficiency (Typ.)	87% @ 230VAC							
	Input Current (Typ.)	0.27A @ 230VAC							
Environment	Inrush Current (Typ.)	COLD START Max. 2A at 230VAC							
	Short Circuit	Yes, auto recovery after fault removed							
	Over Voltage	Yes, auto recovery after fault removed							
Environment	Over Temperature	Yes, auto recovery after fault removed							
	Working Temp.	-20°C ~ +45°C							
	Max. Case Temp.	85°C							
	Working Humidity	10% ~ 95% RH non-condensing							
Environment	Storage Temp. & Humidity	-40°C ~ +85°C, 10% ~ 95% RH							

Product data

Certyfikaty	CE, ROHS
Gwarancja	5 lat

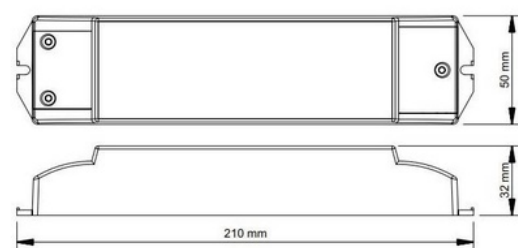

Product variants

Reference

Attributes



SRP-1009-50CC