






Downlight LED circular de encastrar SLIM 12W - Recorte Ø155mm

Downlight LED extraplano empotrable circular 12W SMDs 2835 230V-AC Ø170mm Color Blanco α 160° Incluye driver externo Equivale a dos bombillas de bajo consumo de 18w. 12W 230V Driver externo incluido Marco blanco Diámetro 170mm Ángulo 160° Chip SMD2835

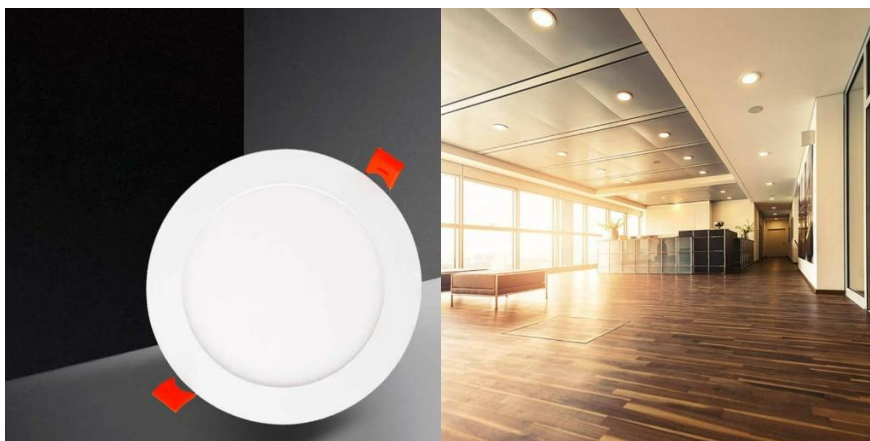

Dados do produto

T° de luz	3000°K, 4000°K, 6000K
Ângulo de abertura (°)	160
Certificados	CE, ROHS
Classe de eficiência energética	F
Forma	Circular, Ultrafino
IP	IP20
Kelvin (K)	3000, 4000, 6000
Potência (W)	12
Tensão Nominal (V)	220 - 240 V CA
Tipo de LED	SMD 2835
Tonalidade	Branco quente, Branco frio, Branco neutro
Vida útil (h)	25000



Variantes do produto

Referência

Atributos

B1271-5-BC

T° de luz : 3000°K



B1271-5-BF

T° de luz : 6000K



B1271-5-BN

T° de luz : 4000°K

