


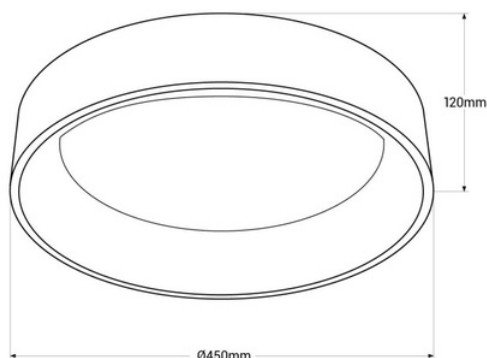

## "ONCAMO 2" LED Ceiling light - 27W

Nordic ceiling lamp type flush mount, composed of an aluminum structure with a gray finish and a polycarbonate diffuser inside. It incorporates a EAGLERISE driver and a Sanan LED chip that allows for homogeneous and quality lighting with a power of 27W. Available in warm white (3000K) and neutral white (4000K).

### Product data

|                       |                                      |
|-----------------------|--------------------------------------|
| Light temperature     | 3000°K (use), 4000°K (use)           |
| Certs                 | CE, ROHS                             |
| CRI                   | 80-85                                |
| Dimensions (mm) LxWxH | 450x450x125                          |
| Dimmable              | No                                   |
| Style                 | Minimalist, Nordic                   |
| Form                  | Circular                             |
| Frequency (Hz)        | 50 - 60                              |
| Guarantee             | According to legal warranty: 3 years |

|                     |                           |
|---------------------|---------------------------|
| IP                  | IP20                      |
| Kelvin (K)          | 3000, 4000                |
| Lumens (Lm)         | 3000                      |
| Material            | Aluminum, Polycarbonate   |
| Assembly            | Surface                   |
| Orientable          | No                        |
| Power (W)           | 27                        |
| Sensor              | No                        |
| Nominal Voltage (V) | 220 - 240 V AC            |
| Key                 | Warm white, Neutral white |
| Outdoor Use         | No                        |
| Service life (h)    | 30000                     |

## Product variants

| Reference     | Attributes                       |                                                                                       |
|---------------|----------------------------------|---------------------------------------------------------------------------------------|
| LN1601-GSP-BC | Light temperature : 3000°K (use) |  |
| LN1601-GSP-BN | Light temperature : 4000°K (use) |  |