




Outdoor LED floodlight 100W - 95lm/W - IP65

100W LED Projector with a compact design, featuring a metal housing and glass diffuser. It is orientable and has an efficiency of 95lm/W. Suitable for outdoor use thanks to its IP65 protection rating. Available in 3 shades: warm white (3000K), neutral white (4000K), and cool white (6000K).



Product data

Light temperature (use)	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	120
Certs	CE, ROHS
CRI	80-85
Dimensions (mm) LxWxH	268 x 180 x 38 mm
Dimmable	No
Driver	Internal
Efficiency (Lm/w)	95
Power factor (cosφ)	0.9
Frequency (Hz)	50 - 60
Frequency of Use	normal
Projector Range	Slim Series
Guarantee	According to legal warranty: 3 years
IP	IP65
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	7770 (WW) / 7960 (NW) / 8140 (CW)
Material	Aluminum
Material diffuser	Crystal
Assembly	Surface
Orientable	No
Power (W)	100
Temperature range	-20°F to +50°F

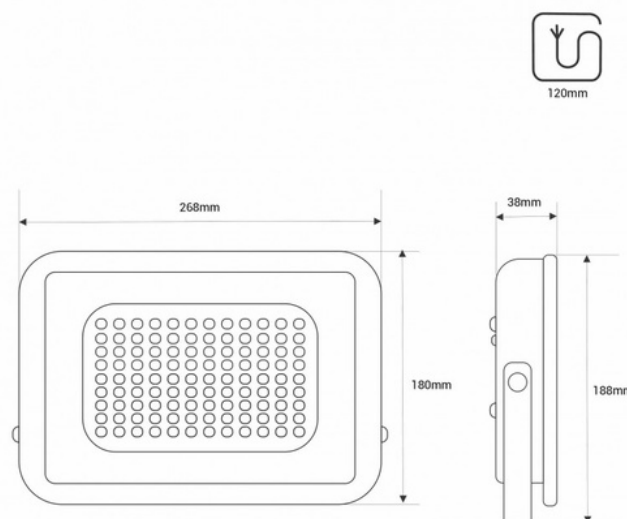

Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	If
Recommended Use	Garden, Parking, Fascias
Service life (h)	25,000

Product variants

Reference	Attributes	
B1884-2-BC	Light temperature (use): 3000°K (use)	
B1884-2-BF	Light temperature (use): 6000K (use)	
B1884-2-BN	Light temperature (use): 4000°K (use)	