


## Mechanical Structures and Installations

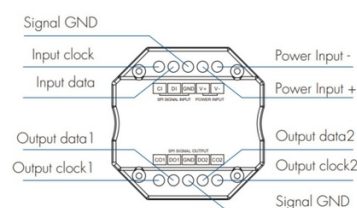


# RGB/RGBW SPI signal splitter - 5-24VDC

## Ref. SK-SA


SPI signal splitter for smart LED strips (IC) RGB and RGBW. Divide a 1 group SPI signal into 2 signals of different groups, allowing for simultaneous control of multiple LED IC strips. It is used with a compatible SPI controller.

### Connect with one SA

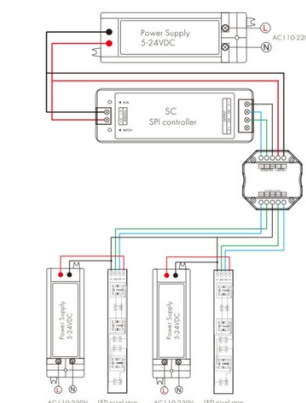

## Product data

Certs	CE, ROHS
Color control	RGB, RGBW
Dimensions (mm) LxWxH	52 x 52 x 26
Guarantee	5 years
IP	IP20
Temperature range	-30°F ~ +55°F
Nominal Voltage (V)	5-24V
Outdoor Use	No

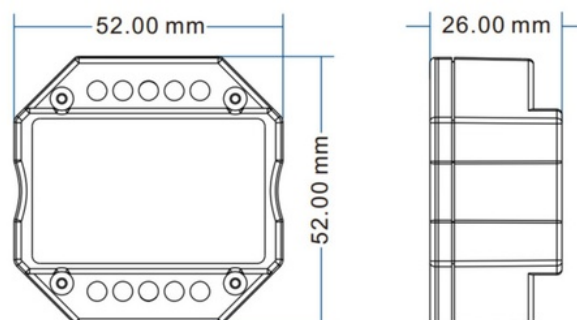

Product variants

Reference	Attributes
SK-SA	