
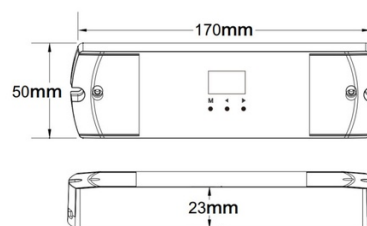


## Mechanical Structures and Installations

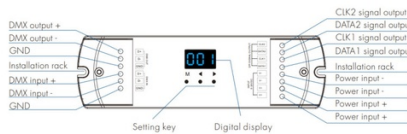


# DMX512 to SPI Pixel Decoder - 5-24V DC - RF Controller

Ref. SK-DS-L


The LED DMX512 to SPI decoder converts DMX signals into SPI signals to control intelligent or digital RGB or RGBW LED strips. It also functions as an RF controller, allowing you to pair it with a 2.4GHz RF remote for convenient and wireless control. It features a digital display and is compatible with numerous types of LED IC chips. Allows you to create a wide variety of impressive and customized lighting effects for your projects.

## Wiring Diagram

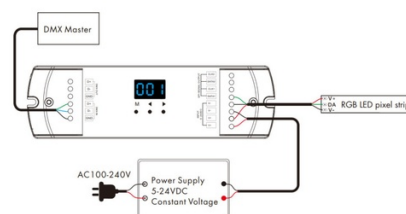

## Product data

Certs	CE, ROHS
Connectivity	Radiofrequency, DMX
Color control	RGB, RGBW
Warranty	5 years
IP	IP20
Temperature range	-30°F ~ +55°F
Nominal Voltage (V)	5-24V
Outdoor Use	No

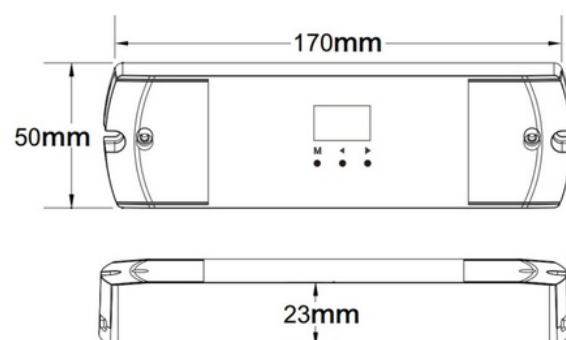

Product variants

Reference

Attributes



SK-DS-L