



Mechanical Structures and Installations

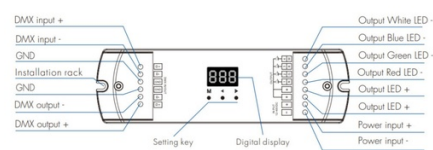

DMX512 Decoder 12-48V DC - 350-1200mA/channel - 4 Channels


Ref. SK-D4C-L

The DMX512 Decoder is an LED lighting control device with 4 output channels with a range of 150-1200mA per channel. It is compatible with input voltages of 12-48V. Use the DMX512 input signal and provide a PWM output signal to achieve smooth lighting control. Supports RDM remote control, allows selection of output resolution and PMW frequency adjustment.



Product data

Certs	CE, ROHS
Connectivity	DMX
Color control	RGB, RGBW
Dimensions (mm) LxWxH	170 x 50 x 23
Guarantee	5 years
Maximum intensity (A)	0.35 - 1.2
IP	IP20
Number of channels	4
Temperature range	-30°F ~ +55°F
Nominal Voltage (V)	12-48V
Outdoor Use	No

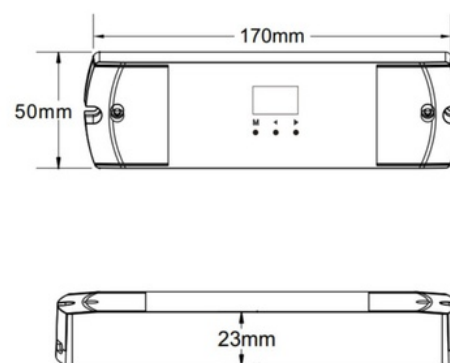

Product variants

Reference

Attributes



SK-D4C-L