


LED ground recessed spotlight 4,5W 220V-AC IP67

Ref. BA50017-BC

LED recessed floor floodlight with a power of 4.5W. Direct connection to 100-240V/AC. Outdoor LED beacon emitting warm light, at 3000 degrees Kelvin. IP67 protection rating, resistant to rain, preventing the entry of dust and water. Emits a very powerful and concentrated light, thanks to its narrow 30° beam angle. Ideal for use in gardens or in indoor spaces such as staircases. Perfect for bathing walls, columns, vegetation, or any type of structure, whether in gardens, pathways, staircases, patios, buildings... Pedestrian traffic usable 100KG. Includes plastic tube for concrete mounting. 100-240V/AC - 4.5W CHIP COB 3000K Ø65x56mm ≈ 56 mm IP67 Cutting diameter 60 mm. Cable length included is 1 meter


Product data

| | |
|-------------------------|--------------------------------------|
| Light temperature | 3000°K (use) |
| Opening angle (°) | 30 |
| Certs | CE, ROHS |
| Energy efficiency class | A+ (2021) |
| Dimensions (mm) LxWxH | Ø65x56 |
| Cutting dimensions (mm) | Ø56 |
| Dimmable | Yes |
| Driver | Not included |
| Frequency (Hz) | 50 - 60 |
| Frequency of Use | normal |
| Guarantee | According to legal warranty: 3 years |
| IP | IP67 |
| Kelvin (K) | 3000 |
| Material | Steel |
| Material diffuser | Polycarbonate |
| Assembly | Recessed |
| Power (W) | 4.5 |
| Temperature range | -20°F ~ +40°F |
| Nominal Voltage (V) | 230 |
| Type of LED | COB |
| Key | Warm white |
| Outdoor Use | If |

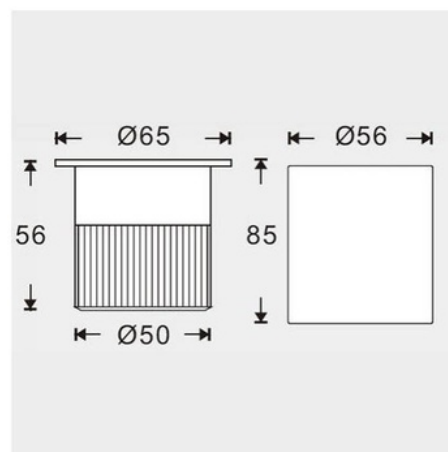

| | |
|------------------|--------|
| Recommended Use | Garden |
| Service life (h) | 25,000 |

Product variants

| Reference | Attributes | |
|------------|----------------------------------|---|
| BA50017-BC | Light temperature : 3000°K (use) |  |