




Recessed LED Panel - 60X60cm - TRIAC dimmable - 44W - UGR19

Recessed LED panel with an ultra-slim design and cutting-edge technology that provides powerful and uniform lighting. It is a high-efficiency luminaire with a power of 44W and a luminous flux of 3800 lumens. It incorporates a TRIAC regulation driver, providing the possibility to adjust the light intensity. Thanks to its low glare index, UGR19, this panel provides great visual comfort. It is available in three shades: warm white (3000K), neutral white (4000K), and cool white (6000K).



Product data

Light temperature	Cold White (DO NOT USE), Warm White, Neutral White
Certs	CE, ROHS
CRI	80-85
Dimensions (mm) LxWxH	600 x 600 x 6
Cutting dimensions (mm)	600x600mm
LED Panel Dimensions	60x60
Dimmable	Yes
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3800
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Power (W)	44
Temperature range	-0°F ~ +30°F
Sensor	No
Nominal Voltage (V)	220-240 V
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white

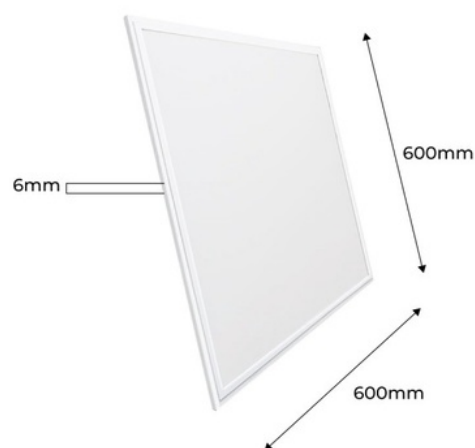

Outdoor Use	No
Service life (h)	25,000

Product variants

Reference

Attributes

K5235-TRIAC-BC

Light temperature : Warm White



K5235-TRIAC-BF

Light temperature : Cold White (DO NOT USE)



K5235-TRIAC-BN

Light temperature : Neutral White

