




## Recessed LED Panel - 60X60cm - 0-10V dimnable - 44W - UGR19


Recessed LED panel with an ultra-thin design and cutting-edge technology that provides powerful and uniform lighting. It is a high-efficiency luminaire with a power of 44W and a luminous flux of 3800 lumens. It incorporates a 0-10V regulation driver, which provides the ability to adjust the light intensity. Thanks to its low glare index, UGR19, this panel provides great visual comfort. It is available in three shades: warm white (3000K), neutral white (4000K), and cool white (6000K).

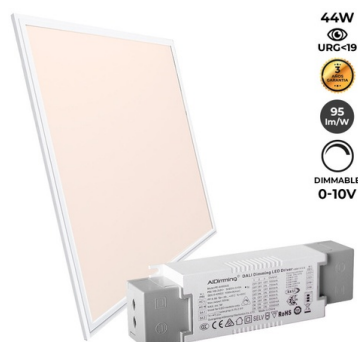

### Product data

Light temperature Cold White (DO NOT USE) , Warm White (DO NOT USE) , Neutral White (DO NOT USE)

Certs	CE, ROHS
CRI	80-85
Dimensions (mm) LxWxH	600x600x6
Cutting dimensions (mm)	600 x 600
LED Panel Dimensions	60x60
Dimmable	Yes
Driver	External
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3800
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Power (W)	44
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

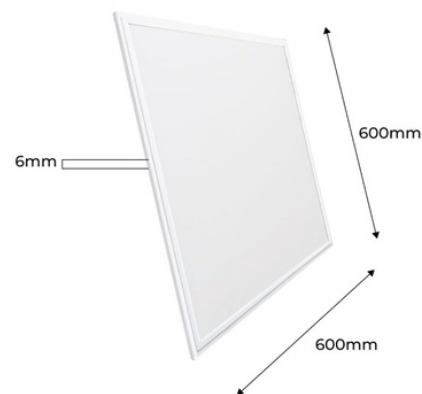

Product variants

Reference	Attributes	
K5235-0-10-BC	Light temperature : Warm White (DO NOT USE)	
K5235-0-10-BF	Light temperature : Cold White (DO NOT USE)	
K5235-0-10-BN	Light temperature : Neutral White (DO NOT USE)	