

## LED Panel 60X60cm with recessed KIT 44W UGR19 Driver Philips


Recessed 60x60cm LED Panel with Philips Driver of 44W ultra-thin SMD2835, UGR19. The Mounting Kit includes all accessories for a quick and easy recessed installation. Kit consists of the panel, 4 retaining clips, and frame. Low glare index (UGR19). With high-performance Philips driver, EMC filter. Warm white of 3000°K, 2822lm. Neutral white of 4000°K, 3432lm. Cool white of 6000°K, 3822lm. High luminous efficiency of 87lm/W. The LED panel allows for installation on Armstrong ceilings (removable false ceiling tiles of 60x60), embedded directly into drywall. Possibility of control via TRIAC or DALI.



### Product data

Light temperature	3000°K, 4000°K, 6000K
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	23.4x23.4x0.37
Cutting dimensions (mm)	600x600
LED Panel Dimensions	60x60
Dimmable	Optional, replacing the driver
Driver	External
Efficiency (Lm/w)	87
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Warranty	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	2822, 3432, 3822
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Temperature range	-0°F ~ +30°F
Sensor	No
Nominal Voltage (V)	230V

Driver Philips 123x43mm  
Grosor: 8mm

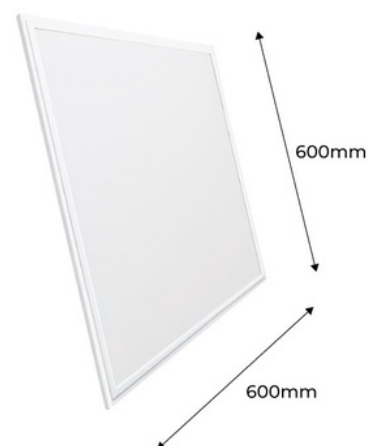

Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

Product variants

Reference	Attributes	
B4295-UGR19-BC	Light temperature : 3000°K	
B4295-UGR19-BF	Light temperature : 6000K	
B4295-UGR19-BN	Light temperature : 4000°K	