




Recessed LED Panel 1200X600mm Slim 72W PHILIPS DRIVER UGR19 with mounting KIT

Philips 120x60cm LED slim recessed panel with 72W power, ultra-thin with cutting-edge aesthetics, ideal for all types of professional/domestic projects. It integrates perfectly into any surface. Placement options: Recessed in Armstrong ceiling (removable ceiling tiles 120x60cm), or directly recessed in drywall false ceilings using anchoring clips, or suspended using the hanging kit for ceiling. Includes a 2 CERTA DRIVE PHILIPS. Accessories sold separately. Includes recessed kit, frame, staples, screws (1200x600mm), with all accessories for quick and easy installation. - x2 Driver: CertiDrive PHILIPS - 230V - 4000LM - 120°F - 1200x600mm - IP20 - UGR19

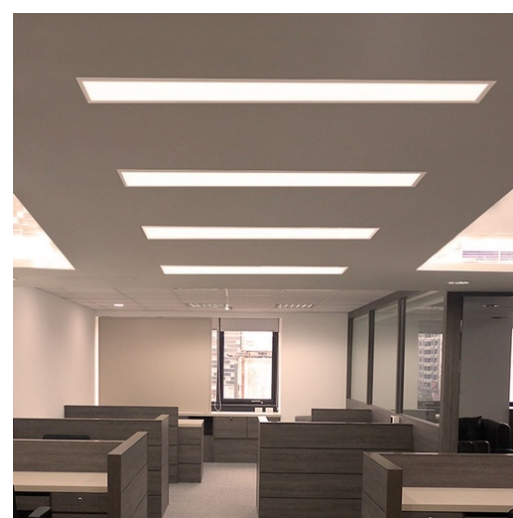

Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	160°
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	1200x600mm
LED Panel Dimensions	120x60
Driver	External
Efficiency (Lm/w)	85
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	6100
Material diffuser	Polycarbonate
Assembly	Recessed

Orientable	No
Power (W)	72
Sensor	No
Nominal Voltage (V)	230V
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No

Product variants

Reference	Attributes	
B4296-BC	Light temperature : 3000°K (use)	 <p>72W URG<19 3 95 lm/W</p>
B4296-BF	Light temperature : 6000K (use)	 <p>72W URG<19 3 95 lm/W</p>
B4296-BN	Light temperature : 4000°K (use)	 <p>72W URG<19 3 95 lm/W</p>