


24W
CRI >80

- LED
- U20
- 100lm/W
- CHIP SMD 2835

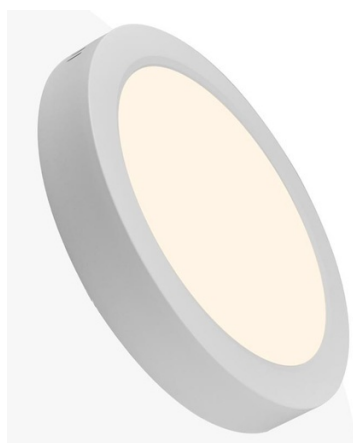


24W
CRI >80

- LED
- U20
- 100lm/W
- CHIP SMD 2835




Surface mounted LED ceiling lamp 24W High Efficiency

Surface-mounted LED ceiling light with a power of 24W. Minimalist design with dimensions of Ø289x38mm. Housing made of polycarbonate with a white finishing. Opal polycarbonate diffuser for a homogeneous and intense light. Thanks to the DOB technology, this LED ceiling light offers high efficiency with 100lm/W, low consumption, and without flicker or noise. Beam angle of 120 degrees. LED luminaria ideal for both professionals and individuals. Perfect lighting that combines excellent efficiency with a compact design for any interior.


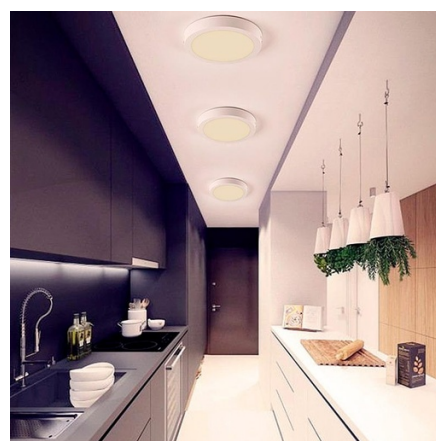


Product data

Light temperature	3000°K, 4000°K, 6000K
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimmable	No
Efficiency (Lm/w)	100
Form	Circular
Frequency of Use	normal
IP	IP20
Kelvin (K)	4000, 6000
Material	Polycarbonate
Material diffuser	Polycarbonate
Assembly	Surface
Orientable	No
Type of LED	SMD 2835
Key	Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

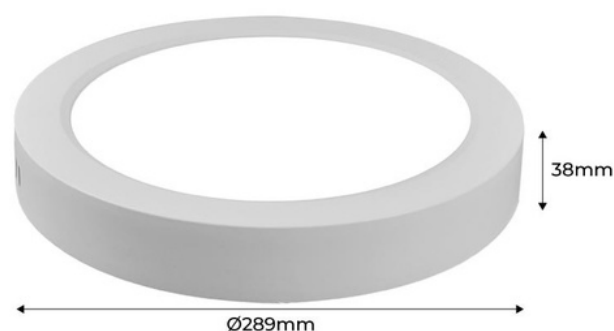

Product variants

Reference	Attributes	
B1230-B-24W-BF	Light temperature : 6000K	 <div>24W CRI >80 IP65 DALI LM78 SMD 2835</div>
B1230-B-24W-BN	Light temperature : 4000°K	 <div>24W CRI >80 IP65 DALI LM78 SMD 2835</div>