

11W/M  
LED  
IP67  
110  
lm/W


## Flexible LED neon 24V DC - 12x12mm - 10 meters - Complete kit - 11W/m - IP67 - Vertical curvature

Our flexible LED neon is the best option for achieving high-impact decorative lighting. It adapts to various surfaces, providing enormous versatility to bring any design to life. Thanks to its high LED chip density (120 chips/m) and a luminous intensity of 1100 lm/m, it ensures powerful, stable, and uniform lighting. Its curved design gives it a light emission angle of 180°, superior to other neon lights. It emits light from its upper face, allowing rotation in the vertical plane. It is made with a silicone tube that is resistant to UV radiation and also has an IP67 protection rating, which allows for outdoor use and ensures its durability. Available in 4 shades: warm white (2800K), neutral white (4000K), cool white (6000K), and in blue color. \*\*The kit includes 20 staples + 4 caps (2 initial and 2 final)\*\*







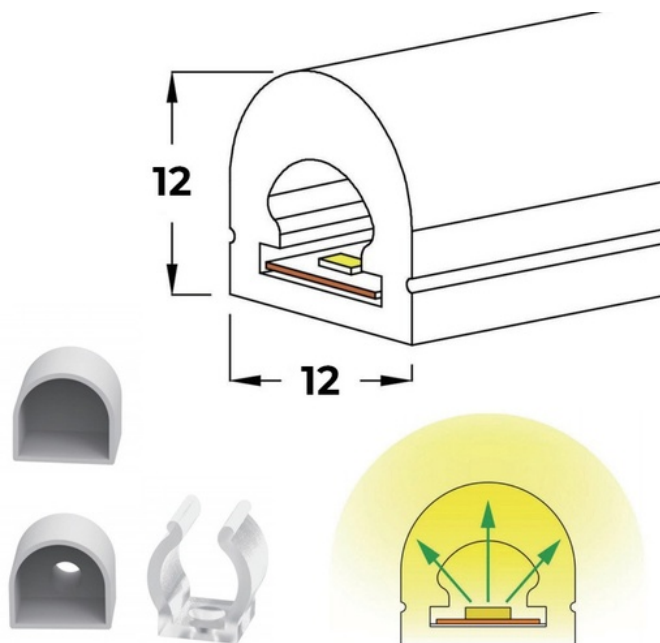


### Product data

|                     |  |
|---------------------|--|
| Light temperature   | 3000°K, 4000°K, 6000K, Amber, Blue, Green, Red ( ) |
| Opening angle (°)   | 180  |
| Certs               | CE, ROHS   |
| CRI                 | 80-85  |
| Cut distance (mm)   | 50   |
| Guarantee           | According to legal warranty: 3 years               |
| IP                  | IP67   |
| Kelvin (K)          | 4000, 6000, 2800                                   |
| Material            | Silicone   |
| # Chips per meter   | 120  |
| Power/m (W/m)       | 11   |
| Nominal Voltage (V) | 24V DC   |
| Type of LED         | SMD 2835   |
| Key                 | Warm white, Cold white, Neutral white, Blue        |
| Outdoor Use         | If   |



Product variants

| Reference     | Attributes                  |   |
|---------------|-----------------------------|---|
| N1212-10M-AMB | Light temperature : Amber   |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div>   |
| N1212-10M-AZ  | Light temperature : Blue    |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div>   |
| N1212-10M-BC  | Light temperature : 3000°K  |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div>   |
| N1212-10M-BF  | Light temperature : 6000K   |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div> |
| N1212-10M-BN  | Light temperature : 4000°K  |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div> |
| N1212-10M-RO  | Light temperature : Red ( ) |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div> |
| N1212-10M-VE  | Light temperature : Green   |  <div> TIW/M<br/> LED<br/> 5050<br/> 1000mm </div> |