


Pack of 20 LED panels slim 60X60 cm - Driver Philips - 44W - UGR19

PACK x 20 recessed LED panels 60X60 cm - Philips Driver. Elegant and ultra-slim panels with advanced technology for powerful and uniform lighting in three shades of white (3000K, 4000K, 6000K). They have a power of 44W and a luminous flux of 3800 lumens. Ideal for offices, conference rooms, schools, or hospitals. High color rendering index (CRI>80) for accurate color reproduction and low glare index (UGR≤19). They can be installed in false ceilings or embedded in plasterboard with a recessed frame (not included).

⇌ Driver Philips 123x43mm




Product data

Light temperature Cold White (DO NOT USE) , Warm White (DO NOT USE) , Neutral White (DO NOT USE)

Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	600x600mm
LED Panel Dimensions	60x60
Dimmable	Optional, replacing the driver
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3900
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Power (W)	44W
Temperature range	-0°F ~ +30°F
Sensor	No
Nominal Voltage (V)	230
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

⇌ Driver Philips 123x43mm

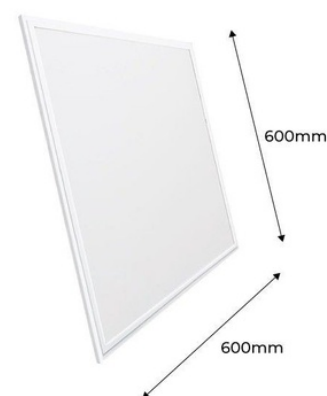

Product variants

Reference	Attributes	
K5235-BC-20	Light temperature : Warm White (DO NOT USE)	
K5235-BF-20	Light temperature : Cold White (DO NOT USE)	
K5235-BN-20	Light temperature : Neutral White (DO NOT USE)	