




72W  
UGR<19  
90 lm/W

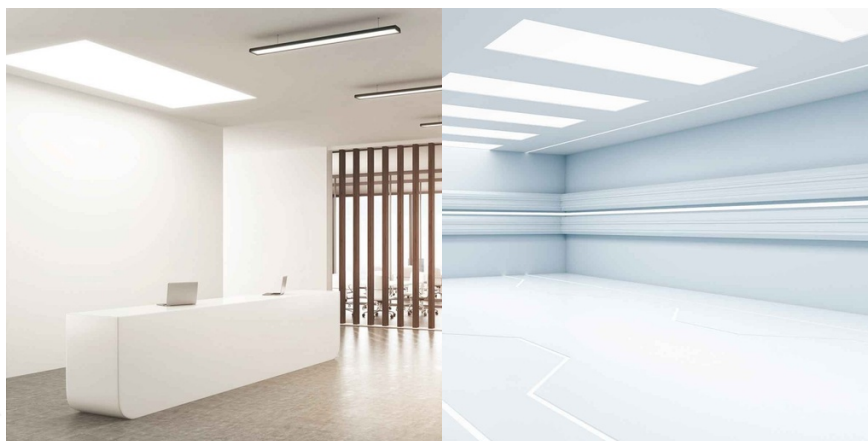

## Pack of 12 slim LED panels 120X60cm - PHILIPS Driver - 72W - UGR19

PACK of 12 recessed LED panels 120x60cm - PHILIPS driver. The panels feature a sleek design, ultra-thin profile, and cutting-edge technology that allows them to provide powerful, uniform lighting in 3 shades: warm white (3000K), neutral white (4000K), and cool white (6000K). They are high-efficiency fixtures with a power of 72W and a luminous flux of 5900 lumens. They incorporate a micro-prismatic diffuser that ensures glare-free illumination ( $UGR \leq 19$ ), ideal for offices, conference rooms, schools, or hospitals. Thanks to their high color rendering index ( $CRI > 80$ ), they reproduce colors very similarly to natural light. The panels can be mounted on false ceilings or embedded directly into drywall using a recessed frame (not included).



### Product data

Light temperature	Cold White , Warm White , Neutral White
Opening angle (°)	160
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	1195 x 595 x 7
LED Panel Dimensions	120x60
Driver	Philips
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	5900
Assembly	Recessed
Orientable	No
Power (W)	72
Temperature range	-18°F ~ +55°F
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 4014
Key	Warm white, Cold white, Neutral white



UGR	UGR19
Outdoor Use	No
Recommended Use	Hotels, Offices, Commerce, Parking
Service life (h)	25,000

## Product variants

Reference	Attributes	
K5234-BF-12	Light temperature : Cold White	
K5234-BN-12	Light temperature : Neutral White	