




72W
UGR<19
90 lm/W

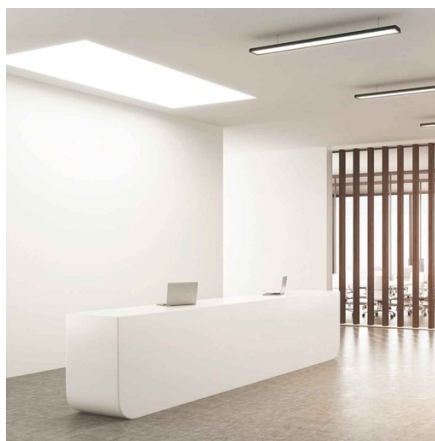

72W
UGR<19
90 lm/W

Pack of 8 slim LED panels 120X60cm - PHILIPS Driver - 72W - UGR19

PACK x 8 recessed LED panels 120x60cm - PHILIPS driver. The panels feature a sleek design, ultra-thin profile, and cutting-edge technology that allows them to provide powerful, uniform lighting in 3 tones: warm white (3000K), neutral white (4000K), and cool white (6000K). They are high-efficiency luminaires with a power of 72W and a luminous flux of 5900 lumens. They incorporate a micro-prismatic diffuser that ensures glare-free lighting (UGR≤19), ideal for offices, conference rooms, schools, or hospitals. Thanks to their high color rendering index (CRI>80), they reproduce colors very similarly to natural light. The panels can be mounted on false ceilings or directly embedded into plasterboard using an inset frame (not included).



72W
UGR<19
90 lm/W

Product data

| | |
|-------------------------|---|
| Light temperature | Cold White , Warm White , Neutral White |
| Opening angle (°) | 160 |
| Certs | CE, ROHS |
| Energy efficiency class | A+ (2021) |
| CRI | 80-85 |
| Dimensions (mm) LxWxH | 1195 x 595 x 7mm |
| LED Panel Dimensions | 120x60 |
| Driver | Philips |
| Frequency (Hz) | 50 - 60 |
| Frequency of Use | Intensive |
| Guarantee | According to legal warranty: 3 years |
| IP | IP20 |
| Kelvin (K) | 3000, 4000, 6000 |
| Lumens (Lm) | 5900 |
| Assembly | Recessed |
| Orientable | No |
| Power (W) | 72 |
| Temperature range | -18°F ~ +55°F |
| Sensor | No |
| Nominal Voltage (V) | 220 - 240 V AC |
| Type of LED | SMD 4014 |
| Key | Warm white, Cold white, Neutral white |



| | |
|------------------|------------------------------------|
| UGR | UGR19 |
| Outdoor Use | No |
| Recommended Use | Hotels, Offices, Commerce, Parking |
| Service life (h) | 25,000 |

Product variants

| Reference | Attributes | |
|------------|-----------------------------------|---|
| K5234-BF-8 | Light temperature : Cold White |  |
| K5234-BN-8 | Light temperature : Neutral White |  |