




72W  
UGR<19  
90 lm/W

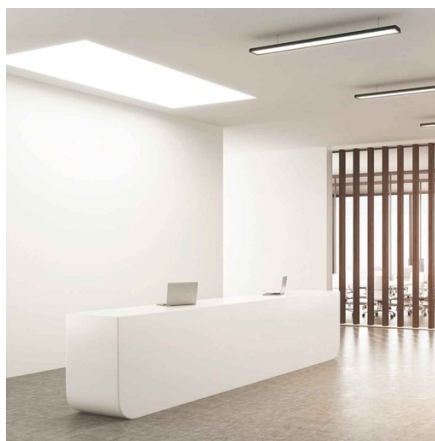

72W  
UGR<19  
90 lm/W

## Pack of 8 slim LED panels 120X60cm - PHILIPS Driver - 72W - UGR19

PACK x 8 recessed LED panels 120x60cm - PHILIPS driver. The panels feature a sleek design, ultra-thin profile, and cutting-edge technology that allows them to provide powerful, uniform lighting in 3 tones: warm white (3000K), neutral white (4000K), and cool white (6000K). They are high-efficiency luminaires with a power of 72W and a luminous flux of 5900 lumens. They incorporate a micro-prismatic diffuser that ensures glare-free lighting (UGR≤19), ideal for offices, conference rooms, schools, or hospitals. Thanks to their high color rendering index (CRI>80), they reproduce colors very similarly to natural light. The panels can be mounted on false ceilings or directly embedded into plasterboard using an inset frame (not included).



72W  
UGR<19  
90 lm/W

### Product data

Light temperature	Cold White , Warm White , Neutral White
Beam angle (°)	160
Certs	CE, ROHS
Energy efficiency class	A+ (2021)
CRI	80-85
Dimensions (mm) LxWxH	1195 x 595 x 7mm
LED Panel Dimensions	120x60
Driver	Philips
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Warranty	According to legal warranty: 3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	5900
Assembly	Recessed
Orientable	No
Power (W)	72
Temperature range	-18°F ~ +55°F
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 4014
Key	Warm white, Cold white, Neutral white



UGR	UGR19
Outdoor Use	No
Recommended Use	Hotels, Offices, Commerce, Parking
Service life (h)	25,000

## Product variants

Reference	Attributes	
K5234-BF-8	Light temperature : Cold White	
K5234-BN-8	Light temperature : Neutral White	