



44W
UGR<19
95 lm/W
DIMMABLE
PUSH



Recessed LED Panel - 60X60cm - PUSH Dimmable - 44W - UGR19


Recessed LED panel with an ultra-slim design and cutting-edge technology that provides powerful and uniform lighting. It is a high-efficiency luminaire with a power of 44W and a luminous flux of 3800 lumens. It incorporates a PUSH regulation driver, providing the possibility to adjust the light intensity. Thanks to its low glare index, UGR19, this panel offers great visual comfort. It is available in three shades: warm white (3000K), neutral white (4000K), and cool white (6000K).



Product data

Light temperature Cold White (DO NOT USE) , Warm White (DO NOT USE) , Neutral White (DO NOT USE)

Certs	CE, ROHS
CRI	80-85
Dimensions (mm) LxWxH	600 x 600 x 6
Cutting dimensions (mm)	600 x 600
LED Panel Dimensions	60x60
Dimmable	Yes
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP20
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3800
Material diffuser	Polycarbonate
Assembly	Recessed
Orientable	No
Power (W)	44
Temperature range	-0°F ~ +30°F
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

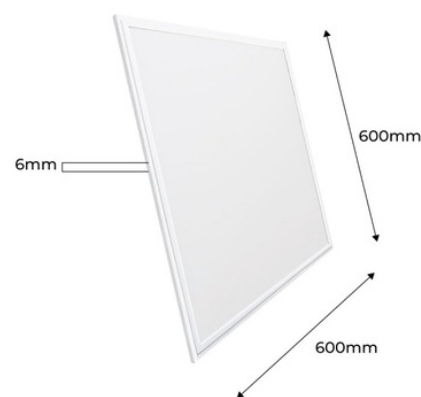

Product variants

Reference	Attributes	
K5235-PUSH-BC	Light temperature : Warm White (DO NOT USE)	
K5235-PUSH-BF	Light temperature : Cold White (DO NOT USE)	
K5235-PUSH-BN	Light temperature : Neutral White (DO NOT USE)	