




## Pack of 10 LED panels slim 120X30 cm - Driver Philips - 44W - UGR19

PACK x 10 recessed LED panels 120X30 cm - Philips Driver Elegant and ultra-thin panels with advanced technology for powerful and uniform lighting in three shades of white (3000K, 4000K, 6000K). They have a power of 44W and a luminous flux of 2900 lumens. Ideal for offices, conference rooms, schools, or hospitals. High Color Rendering Index (CRI>80) for accurate color reproduction and low glare index (UGR≤19). They can be mounted on false ceilings or recessed in drywall with a recessed frame (not included).

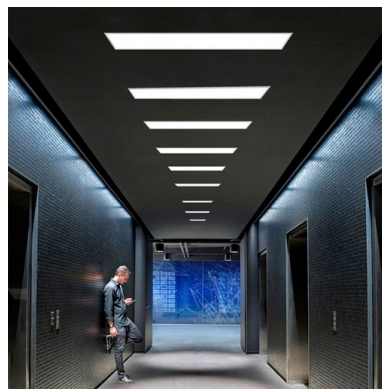

### Product data

Light temperature	Cold White (DO NOT USE) , Warm White (DO NOT USE) , Neutral White (DO NOT USE)
Certs	CE, ROHS
CRI	80-85
Dimensions (mm) LxWxH	1200x300x6mm
LED Panel Dimensions	120x30
Dimmable	Optional, replacing the driver
Driver	External
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	3 years
IP	IP65
Kelvin (K)	3000, 6000, 2700
Lumens (Lm)	2900
Material diffuser	Polycarbonate
Assembly	Recessed
Power (W)	44
Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
Outdoor Use	No
Service life (h)	25,000

Driver Philips 123x43mm



Product variants

Reference	Attributes	
K5236-10-BC	Light temperature : Warm White (DO NOT USE)	
K5236-10-BF	Light temperature : Cold White (DO NOT USE)	
K5236-10-BN	Light temperature : Neutral White (DO NOT USE)	