

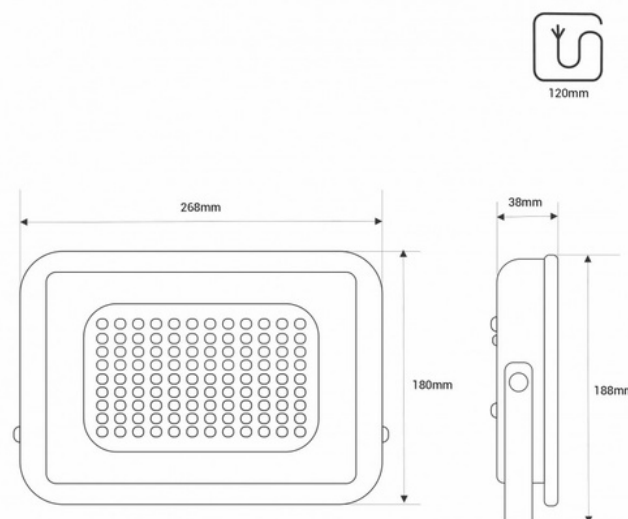
## Pack of 10 outdoor LED floodlights 100W - 95lm/W - IP65

Pack of 10 LED Projector Lights for outdoor use, 100W, of high quality. Thanks to its IP65 protection rating, the fixture can be used outdoors, resistant to water, humidity, dust, and dirt. With dimensions of 290x180x37mm and a high-quality reflector, with a wide beam angle of 120°. The adjustable support at a 180° angle allows for installation on walls, ceilings, or floors, in addition to directing light to the desired location. LED spotlights are perfect for both outdoor and indoor use, commonly used especially in gardens, shopping centers, home or business entrances, or to highlight an object, sculpture, or plant. 230V. Chip LED SMD 2835. Optimal color rendering index (CRI>80). Cold color temperature of 6000°K and a luminous intensity of 7847lm.





### Product data

Light temperature	3000°K (use), 4000°K (use), 6000K (use)
High	38mm
Width	180mm
Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	F
CRI	80-85
Dimmable	No
Driver	Internal
Frequency (Hz)	50 - 60
Frequency of Use	normal
Projector Range	Slim Series, Packs
Guarantee	3 years
IP	IP65
Kelvin (K)	3000, 4000, 6000
Long	268 mm
Material	Aluminum
Material diffuser	Crystal
Assembly	Surface
Orientable	Yes
Power (W)	100
Temperature range	-18°F ~ +55°F



Sensor	No
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white
UGR	No
Outdoor Use	If
Service life (h)	25,000

Product variants

Reference	Attributes	
K1884-10-BC	Light temperature : 3000°K (use)	
K1884-10-BF	Light temperature : 6000K (use)	
K1884-10-BN	Light temperature : 4000°K (use)	