


Recessed CCT Backlight LED Panel - 60x60cm - 30W - 125lm/W - IP65


Ref. B5235-IP65-CCT

The LED Backlight panel features backlight technology or backlit, which provides high-efficiency, uniform lighting with minimal glare. It has a power of 30W, a high efficiency of 125lm/W, and a high color rendering index, CRI>80. Due to its IP65 protection rating, it is suitable for use in humid environments. It incorporates a CCT temperature selector, allowing the color temperature to be adjusted between warm white (3000K), neutral white (4000K), and cool white (6000K). ** 5-Year Warranty **



Product data

Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	E
CRI	80-85
LED Panel Dimensions	60x60
Driver	External
Efficiency (Lm/w)	125
Frequency (Hz)	50 - 60
Guarantee	5 years
IP	IP65
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3750
Assembly	Recessed, Suspension
Orientable	No
Power (W)	30
Sensor	No
LED Technology	BACKLIT - BACKLIGHT
Nominal Voltage (V)	220 - 240 V AC
Key	CCT
Recommended Use	Hotels, Commerce, Parking, Terraces, Balconies, Bathrooms
Service life (h)	25,000

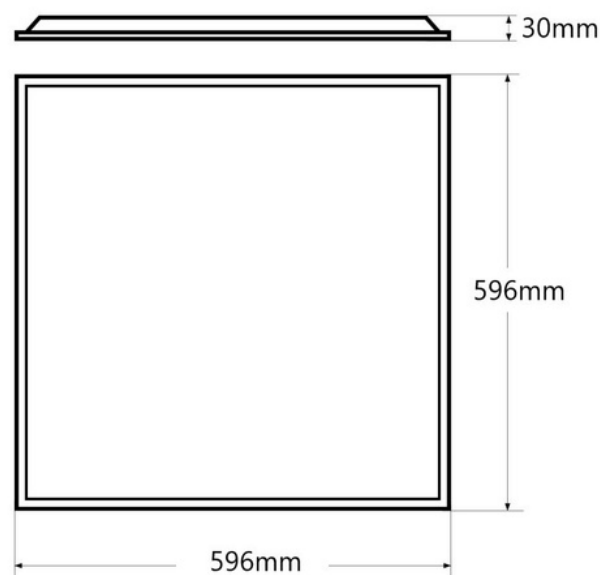

Product variants

Reference

Attributes



B5235-IP65-CCT