


Recessed CCT Backlight LED Panel - 120x30cm - 30W - 125lm/W - IP65


Ref. B5236-IP65-CCT

The LED Backlight panel features backlight technology or backlit, which combines innovative optical and mechanical design characteristics to achieve high efficiency lighting that is uniform and minimizes glare. It has a power of 30W, a high efficiency of 125lm/W, and a high color rendering index, CRI>80. It incorporates a CCT temperature selector, which allows you to adjust the color temperature between warm white (3000K), neutral white (4000K), and cool white (6000K). ** 5-Year Warranty **

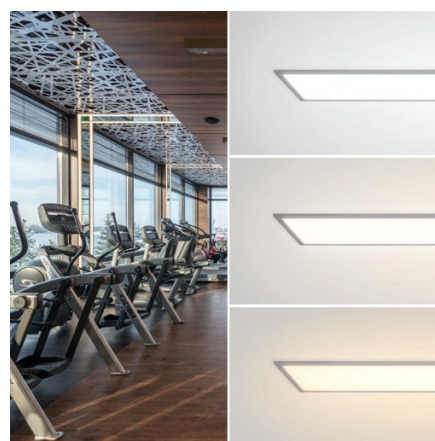

Product data

Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	E
CRI	80-85
Dimensions (mm) LxWxH	1196 x 296 x 33
LED Panel Dimensions	120x30
Driver	External
Efficiency (Lm/w)	125
Frequency (Hz)	50 - 60
Guarantee	5 years
IP	IP65
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3750
Assembly	Recessed
Orientable	No
Power (W)	30
Sensor	No
LED Technology	BACKLIT - BACKLIGHT
Nominal Voltage (V)	220 - 240 V AC
Key	CCT
Recommended Use	Hotels, Commerce, Parking, Terraces, Balconies, Bathrooms
Service life (h)	25,000

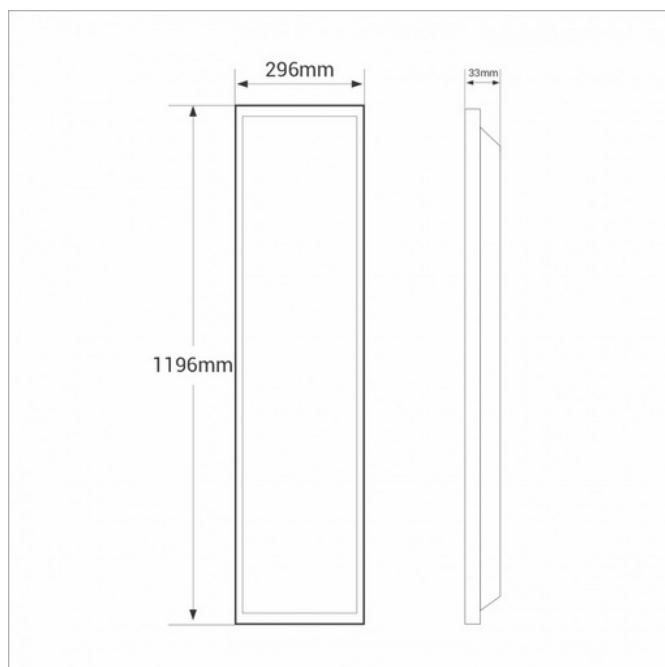

Product variants

Reference

Attributes



B5236-IP65-CCT