



## Recessed Backlight LED panel - 36W - 60x60cm - 3800lm - Philips driver - UGR22 - IP40

The Philips LED Backlight panel with driver features backlight or backlit technology, which combines innovative optical and mechanical design characteristics to achieve high-efficiency, uniform lighting with minimal glare (UGR 22). Available in neutral white (4000K), warm white (3000K), and cool white (6000K), it has a power of 36W and a luminous flux of 3800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similarly to natural light. \*\* 5-Year Warranty \*\*



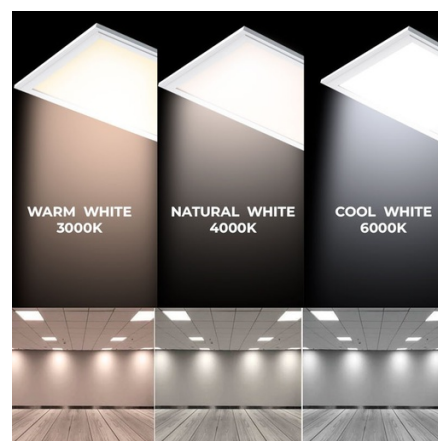

### Product data

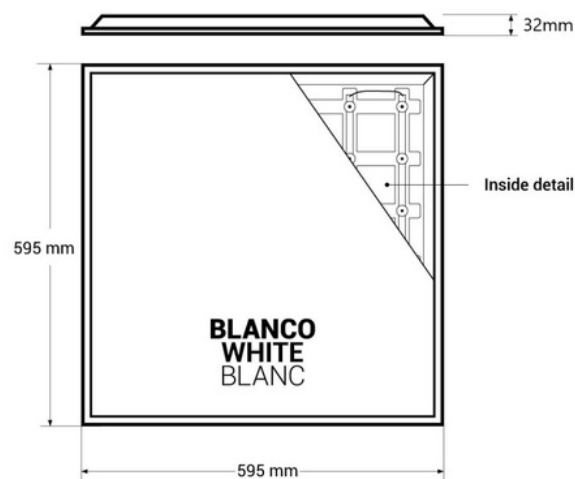Light temperature	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	D
CRI	80-85
Dimensions (mm) LxWxH	595 x 595 x 32
LED Panel Dimensions	60x60
Dimmable	No
Driver	Philips
Power factor (cosφ)	0.9
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	5 years
IP	IP40
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3800
Assembly	Recessed
Power (W)	36
LED Technology	BACKLIT - BACKLIGHT
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white



UGR	UGR22
Outdoor Use	No
Recommended Use	Offices, Commerce, Parking
Service life (h)	25,000

## Product variants

Reference	Attributes	
B5235-BACKLIGHT-BC	Light temperature : 3000°K (use)	
B5235-BACKLIGHT-BF	Light temperature : 6000K (use)	
B5235-BACKLIGHT-BN	Light temperature : 4000°K (use)	