



Recessed Backlight LED panel - 36W - 60x60cm - 3800lm - Philips driver - UGR22 - IP40

The Philips LED Backlight panel with driver features backlight or backlit technology, which combines innovative optical and mechanical design characteristics to achieve high-efficiency, uniform lighting with minimal glare (UGR 22). Available in neutral white (4000K), warm white (3000K), and cool white (6000K), it has a power of 36W and a luminous flux of 3800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similarly to natural light. ** 5-Year Warranty **



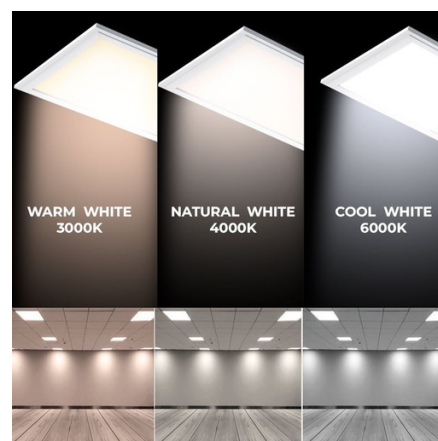


Product data
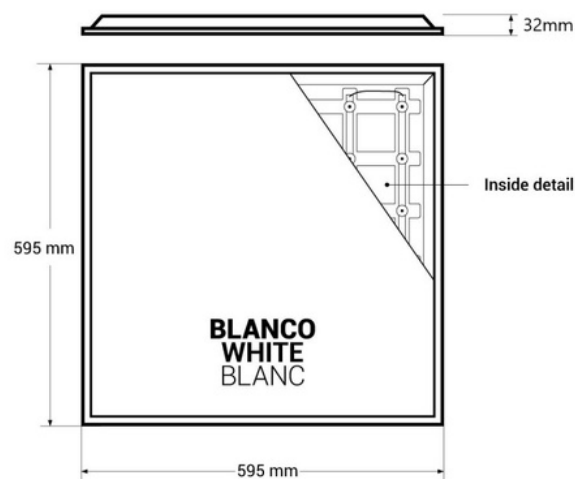
| | |
|-------------------------|---------------------------------------|
| Light temperature | 3000°K, 4000°K, 6000K |
| Opening angle (°) | 120 |
| Certs | CE, ROHS |
| Energy efficiency class | D |
| CRI | 80-85 |
| Dimensions (mm) LxWxH | 595 x 595 x 32 |
| LED Panel Dimensions | 60x60 |
| Dimmable | No |
| Driver | Philips |
| Power factor (cosφ) | 0.9 |
| Frequency (Hz) | 50 - 60 |
| Frequency of Use | Intensive |
| Guarantee | 5 years |
| IP | IP40 |
| Kelvin (K) | 3000, 4000, 6000 |
| Lumens (Lm) | 3800 |
| Assembly | Recessed |
| Power (W) | 36 |
| LED Technology | BACKLIT - BACKLIGHT |
| Nominal Voltage (V) | 220 - 240 V AC |
| Type of LED | SMD 2835 |
| Key | Warm white, Cold white, Neutral white |



| | |
|------------------|----------------------------|
| UGR | UGR22 |
| Outdoor Use | No |
| Recommended Use | Offices, Commerce, Parking |
| Service life (h) | 25,000 |

Product variants

| Reference | Attributes | |
|--------------------|----------------------------|---|
| B5235-BACKLIGHT-BC | Light temperature : 3000°K |  |
| B5235-BACKLIGHT-BF | Light temperature : 6000K |  |
| B5235-BACKLIGHT-BN | Light temperature : 4000°K |  |