



Recessed Backlight LED panel - 36W - 60x60cm - 3800lm - Philips driver - UGR22 - IP40

The Philips LED Backlight panel with driver features backlight or backlit technology, which combines innovative optical and mechanical design characteristics to achieve high-efficiency, uniform lighting with minimal glare (UGR 22). Available in neutral white (4000K), warm white (3000K), and cool white (6000K), it has a power of 36W and a luminous flux of 3800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similarly to natural light. ** 5-Year Warranty **

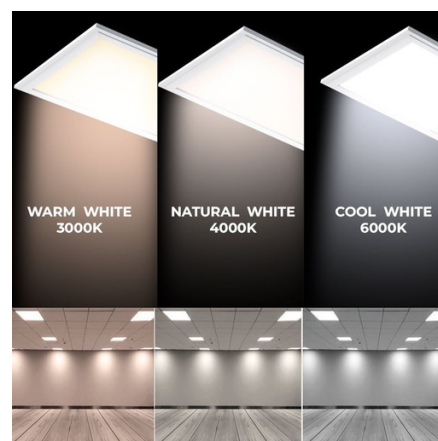

Product data

Light temperature (use)	3000°K (use), 4000°K (use), 6000K (use)
Opening angle (°)	120
Certs	CE, ROHS
Energy efficiency class	D
CRI	80-85
Dimensions (mm) LxWxH	595 x 595 x 32
LED Panel Dimensions	60x60
Dimmable	No
Driver	Philips
Power factor (cosφ)	0.9
Frequency (Hz)	50 - 60
Frequency of Use	Intensive
Guarantee	5 years
IP	IP40
Kelvin (K)	3000, 4000, 6000
Lumens (Lm)	3800
Assembly	Recessed
Power (W)	36
LED Technology	BACKLIT - BACKLIGHT
Nominal Voltage (V)	220 - 240 V AC
Type of LED	SMD 2835
Key	Warm white, Cold white, Neutral white

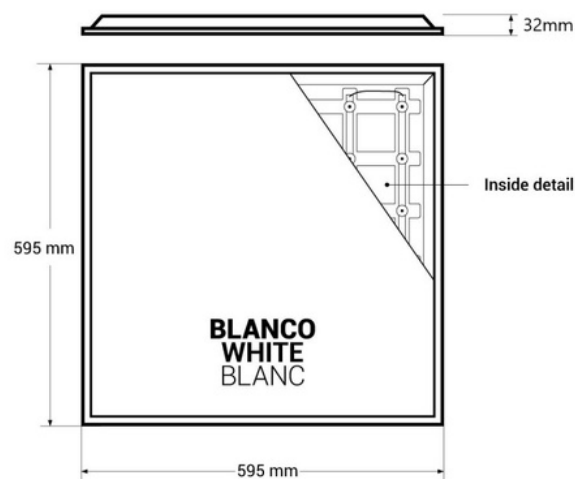

UGR	UGR22
Outdoor Use	No
Recommended Use	Offices, Commerce, Parking
Service life (h)	25,000

Product variants

Reference	Attributes	
B5235-BACKLIGHT-BC	Light temperature (use): 3000°K (use)	
B5235-BACKLIGHT-BF	Light temperature (use): 6000K (use)	
B5235-BACKLIGHT-BN	Light temperature (use): 4000°K (use)	