





Panel LED wpuszczany Backlit 60x60cm - 40W - 4800lm - Sterownik LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

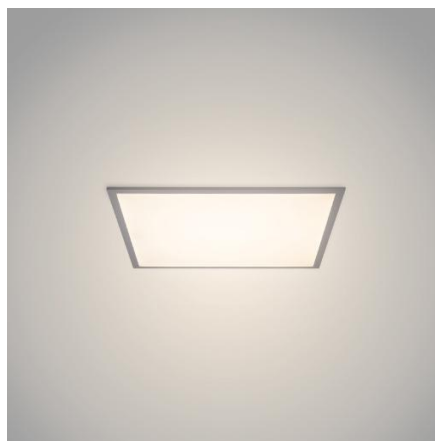

Product data

T° światła	4000°K, 6500K
lumeny (Lm)	4800
Żywotność (h)	25000
Tonacja	Zimna biel, Neutralna biel
CRI	80-85
Klasa efektywności energetycznej	D
Certyfikaty	CE, ROHS
Gwarancja	5 lat
Wymiary Panelu LED	60x60

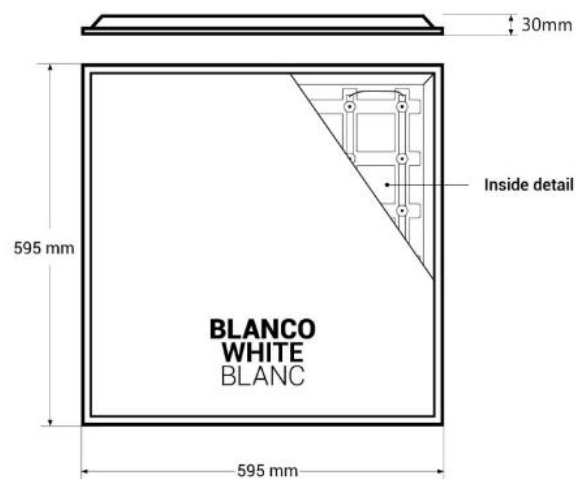

Product variants

Reference

Attributes

B5235-BACKLIT-1-BF

T° światła : 6500K



B5235-BACKLIT-1-BN

T° światła : 4000°K

