





Einbau-LED-Panel Backlit 60x60cm - 40W - 4800lm - Treiber LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

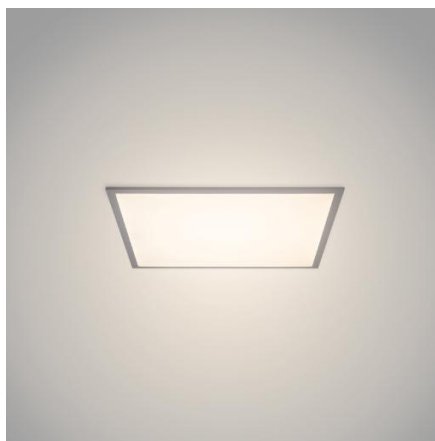

Produktdaten

Lichttemperatur	4000°K, 6500K
Lumen (Lm)	4800
Nutzungsdauer (h)	25000
Tonalität	Kaltes Weiß, Neutralweiß
CRI	80-85
Energieeffizienzklasse	D
Zertifikate	CE, ROHS
Garantie	5 Jahre
Dimensionen LED-Panel	60x60

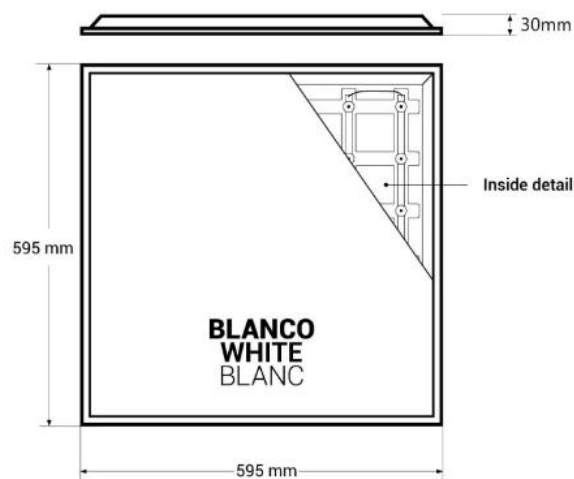

Produktvarianten

Artikelnummer

Eigenschaften

B5235-BACKLIT-1-BF

Lichttemperatur : 6500K



B5235-BACKLIT-1-BN

Lichttemperatur : 4000°K

