





## Πάνελ LED ενσωματωμένο Backlit 60x60cm - 40W - 4800lm - Driver LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology, which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

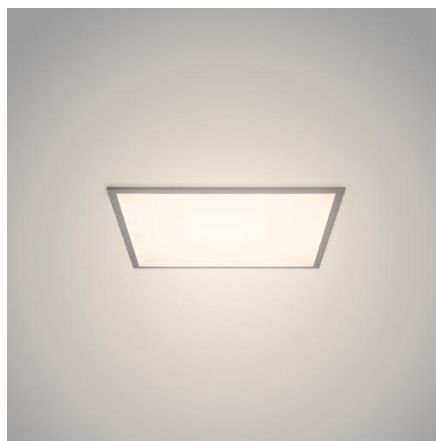

### Product data

|                            |                              |
|----------------------------|------------------------------|
| Θερμοκρασία φωτός          | 4000°K, 6500K                |
| Λούμεν (Lm)                | 4800                         |
| Χαρακτηριστική ζωή (h)     | 25000                        |
| Τονικότητα                 | Λευκός κρύος, Ουδέτερο λευκό |
| KPI                        | 80-85                        |
| Κλάση ενεργειακής απόδοσης | Δ                            |
| Πιστοποιητικά              | KE, POH                      |
| Εγγύηση                    | 5 χρόνια                     |
| Διαστάσεις Πάνελ LED       | 60x60                        |

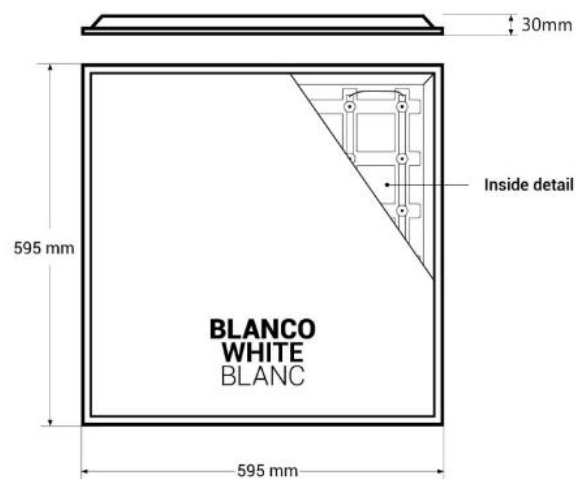

## Product variants

Reference

Attributes

B5235-BACKLIT-1-BF

Θερμοκρασία φωτός : 6500K



B5235-BACKLIT-1-BN

Θερμοκρασία φωτός : 4000°K

