


## Recessed Backlit LED Panel 24x24in - 40W - 4800lm - LIFUD Driver - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.



### Product data

Light temperature	4000°K, 6500K
Lumens (Lm)	4800
Service life (h)	25,000
Key	Cold white, Neutral white
CRI	80-85
Energy efficiency class	D
Certs	CE, ROHS
Warranty	5 years
LED Panel Dimensions	60x60

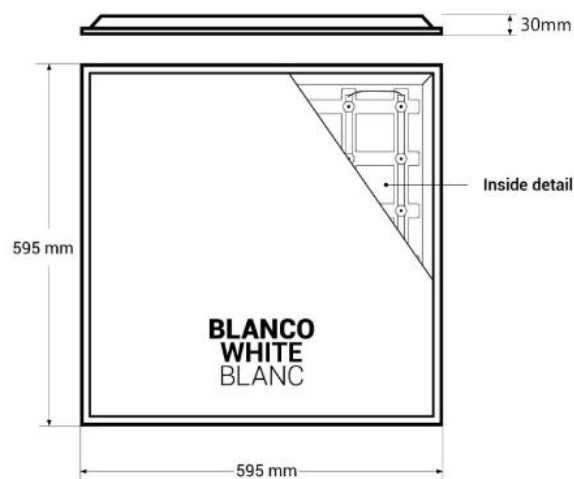

Product variants

Reference	Attributes	
B5235-BACKLIT-1-BF	Light temperature : 6500K	<div> <div> <div>40W</div> <div> <div></div> <div>USB-C22</div> </div> </div> <div> <div>Lifud</div> <div> <div></div> <div></div> </div> </div> </div>
B5235-BACKLIT-1-BN	Light temperature : 4000°K	<div> <div> <div>40W</div> <div> <div></div> <div>USB-C22</div> </div> </div> <div> <div>Lifud</div> <div> <div></div> <div></div> </div> </div> </div>