





Panel LED empotrable Backlit 60x60cm - 40W - 4800lm - Driver LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

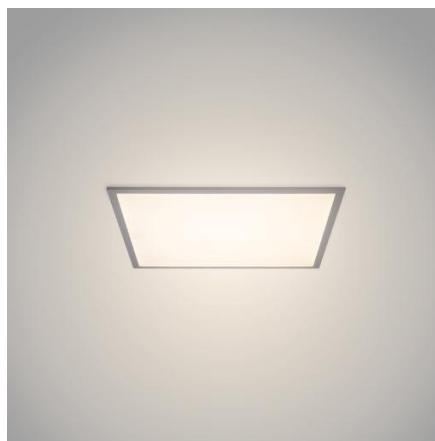

Datos del producto

T° de luz	4000°K, 6500K
Lumens (Lm)	4800
Vida útil (h)	25000
Tonalidad	Blanco frío, Blanco neutro
CRI	80-85
Clase eficiencia energética	D
Certificados	CE, ROHS
Garantía	5 años
Dimensiones Panel LED	60x60

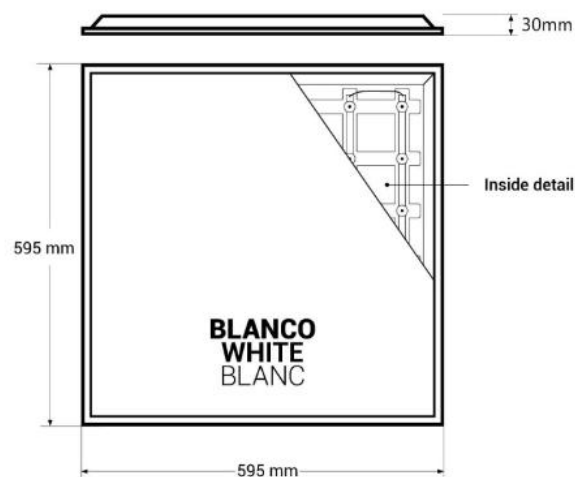

Variantes de producto

Referencia

Atributos

B5235-BACKLIT-1-BF

T° de luz: 6500K



B5235-BACKLIT-1-BN

T° de luz: 4000°K

