





Panneau LED encastré Backlit 60x60cm - 40W - 4800lm - Driver LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

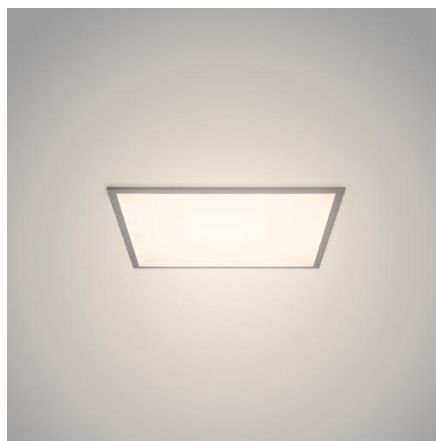

Caractéristiques du produit

T° de lumière	4000°K, 6500K
Lumens (Lm)	4800
Durée de vie (h)	25000
Tonalité	Blanc froid, Blanc neutre
CRI	80-85
Classe d'efficacité énergétique	D
Certificats	CE, ROHS
Garantie	5 ans
Dimensions du panneau LED	60x60

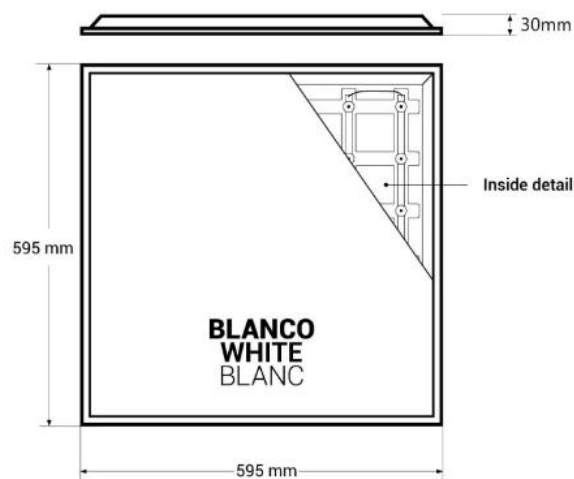

Variantes du produit

Référence

Attributs

B5235-BACKLIT-1-BF

T° de lumière : 6500K



B5235-BACKLIT-1-BN

T° de lumière : 4000°K

