





Plafoniera LED incassata Backlit 60x60cm - 40W - 4800lm - Driver LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

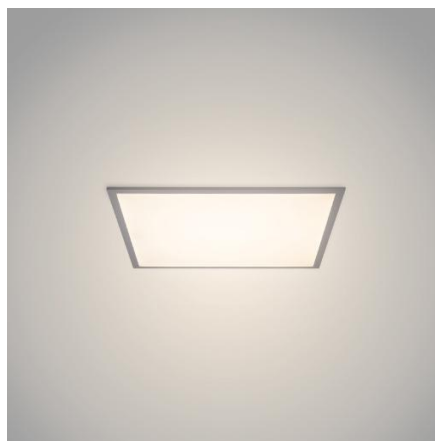

Dati del prodotto

T° di luce	4000°K, 6500K
Lumeni (Lm)	4800
Vita utile (h)	25.000
Tonalità	Bianco freddo, Bianco neutro
CRI	80-85
Classe di efficienza energetica	D
Certificati	CE, ROHS
Garanzia	5 anni
Dimensioni Pannello LED	60x60

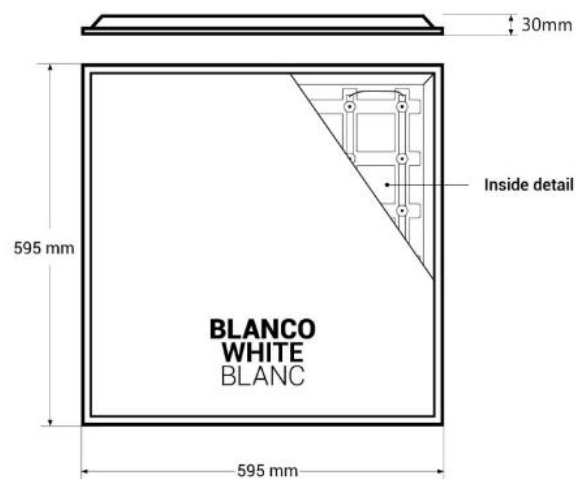

Varianti di prodotto

Riferimento

Attributi

B5235-BACKLIT-1-BF

T° di luce : 6500K



B5235-BACKLIT-1-BN

T° di luce : 4000°K

