





Inbouw LED Paneel Backlit 60x60cm - 40W - 4800lm - Driver LIFUD - UGR22

LED panel with Lifud driver and backlight or backlit technology , which combines innovative optical and mechanical design features to achieve high efficiency, uniform illumination with minimum glare (UGR 22). Available in neutral white (4000K) and cool white (6500K), it has a power of 40W and a luminous flux of 4800 lumens. Its high color rendering index, CRI>80, allows it to reproduce colors very similar to natural light.

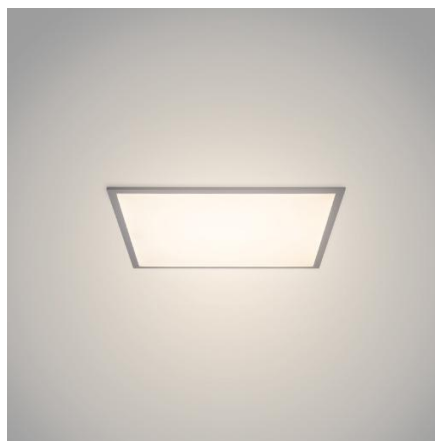

Product data

T° van licht	4000°K, 6500K
Lumen (Lm)	<.generated_text>4800
Houdbaarheid (u)	25000
Toonladder	Wit koud, Neutraal wit
CRI	80-85
Klasse energie-efficiëntie	D
Certificaten	CE, ROHS
Garantie	5 jaar
Afmetingen LED-paneel	60x60

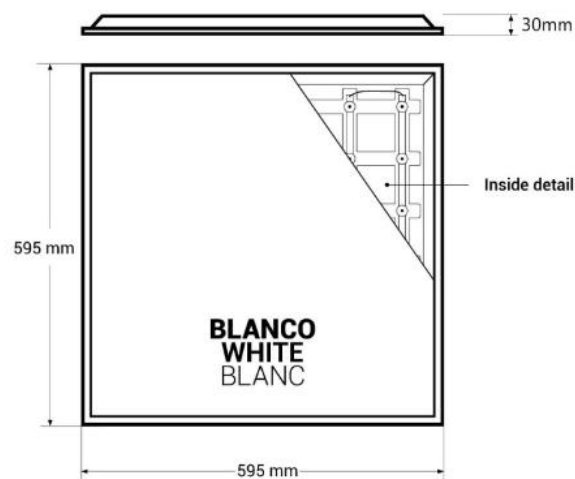

Product variants

Reference

Attributes

B5235-BACKLIT-1-BF

T° van licht : 6500K



B5235-BACKLIT-1-BN

T° van licht : 4000°K

